


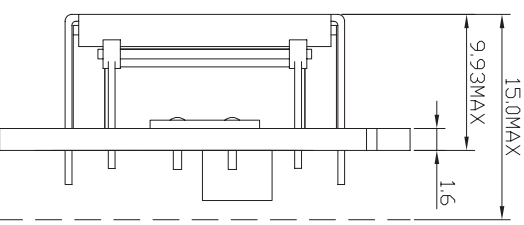


REV	ECN NO.	NATURE OF MODIFICATION	CN/DATE
A		First issued	18/09/08
B		Modified thickness of module	26/09/08
C			

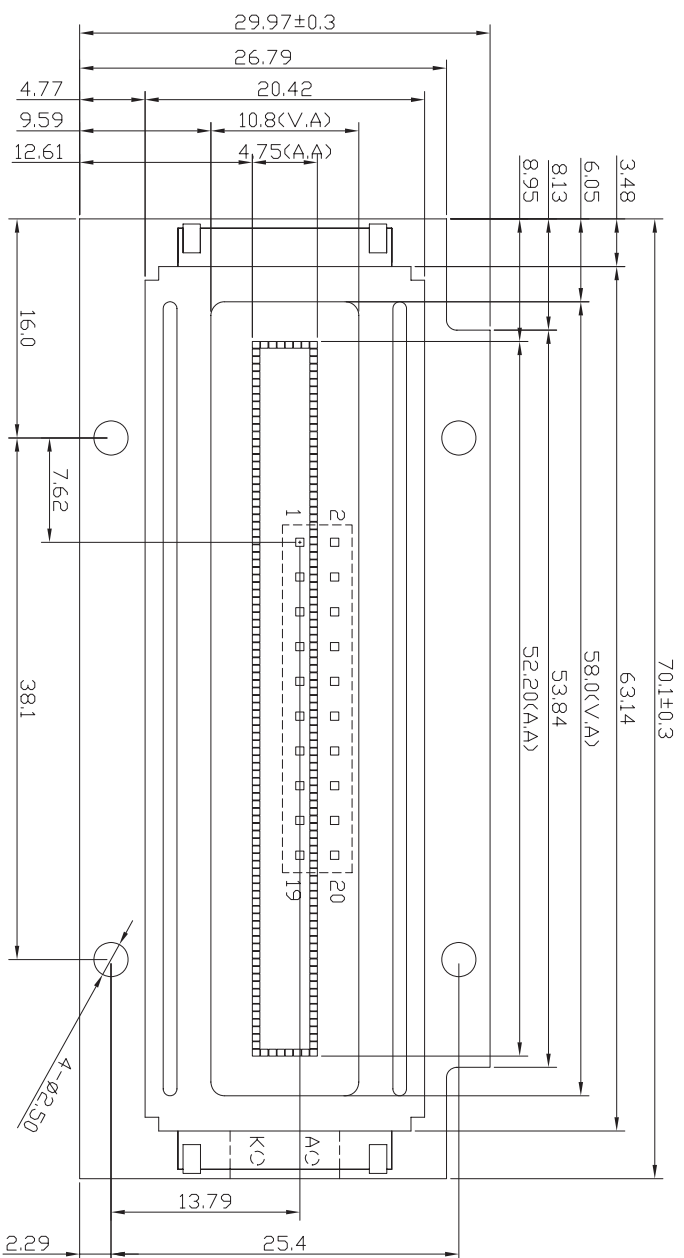


Dots detail(5:1)

20	K(LED-)
19	A(LED+)
18	RES
17	DB7
16	DB6
15	DB5
14	DB4
13	DB3
12	DB2
11	DB1
10	DB0
9	R/W
8	Heater(-)
7	Heater(+)
6	NC
5	E
4	A0
3	NC
2	VDD
1	VSS

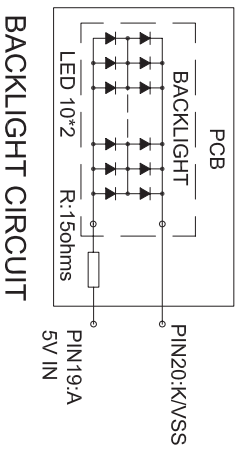

BACKLIGHT CIRCUIT

HLE-110-02-G-DV-A OR EQU

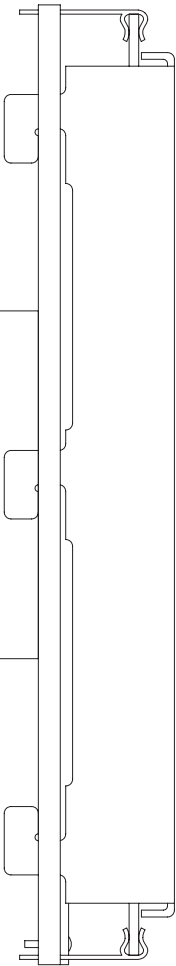

ITEM	PARAMETERS	ITEM	PARAMETERS
OPERATING VOLTAGE	5.0V	OPERATING TEMP	-20° C TO 70° C
OPERATING CURRENT	--	STORAGE TEMP	-30° C TO 90° C
LCD DRIVE VOLTAGE	5.0V	POLARIZER TYPE	FRONT: TRANSMISSIVE BACK: TRANSPARENT
LCD DRIVE METHOD	1/17DUTY, 1/5BIAS	BACKLIGHT	LED-BOTTOM RED, IF=100mA
LCD DRIVE IC	ST7522 OR EQU	ROHS STANDARD	YES ■
VIEW DIRECTION	6:00 O'CLOCK	OTHER	--

UNIT	TOLERANCE	TITLE:	LCM
MM	X.X = ±0.2 X.XX = ±0.10	MODEL NO.:	AGM9508A-FLR-FBE
3RD ANGLE	X.XX = ±0.10 ANG = -	CHECKED:	
SCALE:	1:1	APPROVED:	
DRAWN:		PART NO.:	--

# AZ Displays

1	2	3	4	5	6	7	8