

KOE

JDI Group

Kaohsiung Opto-Electronics Inc.

FOR MESSRS : _____

DATE : Jun. 18th, 2012

CUSTOMER'S ACCEPTANCE SPECIFICATIONS

TX14D11VM1CAA

Contents

No.	ITEM	SHEET No.	PAGE
1	COVER	7B64PS 2701-TX14D11VM1CAA-7	1-1/1
2	RECORD OF REVISION	7B64PS 2702-TX14D11VM1CAA-7	2-1/3~3/3
3	GENERAL DATA	7B64PS 2703-TX14D11VM1CAA-7	3-1/1
4	ABSOLUTE MAXIMUM RATINGS	7B64PS 2704-TX14D11VM1CAA-7	4-1/1
5	ELECTRICAL CHARACTERISTICS	7B64PS 2705-TX14D11VM1CAA-7	5-1/3~3/3
6	OPTICAL CHARACTERISTICS	7B64PS 2706-TX14D11VM1CAA-7	6-1/3~3/3
7	BLOCK DIAGRAM	7B64PS 2707-TX14D11VM1CAA-7	7-1/1
8	INTERFACE TIMING CHART	7B64PS 2708-TX14D11VM1CAA-7	8-1/5~5/5
9	DIMENSIONAL OUTLINE	7B64PS 2709-TX14D11VM1CAA-7	9-1/2~2/2
10	APPEARANCE STANDARD	7B64PS 2710-TX14D11VM1CAA-7	10-1/5~5/5
11	PRECAUTION IN DESIGN	7B64PS 2711-TX14D11VM1CAA-7	11-1/3~3/3
12	DESIGNATION OF LOT MARK	7B64PS 2712-TX14D11VM1CAA-7	12-1/1
13	PRECAUTION FOR USE	7B64PS 2713-TX14D11VM1CAA-7	13-1/1

ACCEPTED BY: _____

PROPOSED BY: 

RECORD OF REVISION

DATE	SHEET No.	SUMMARY																																		
Nov.28,'03	7B64PS 2703- TX14D11VM1CAA-2 PAGE 3-1/1	3. GENERAL DATA ADDED : (14) View Direction 6 O'clock																																		
	7B64PS 2706- TX14D11VM1CAA-2 PAGE 6-1/3	6.1 OPTICAL CHARACTERISTICS OF LCD <table><tr><th>ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>TYP.</th></tr><tr><td rowspan="4">Viewing Area</td><td>θx</td><td>$\phi=0^{\circ},K\geq 5.0$</td><td>(50)</td></tr><tr><td>$\theta x'$</td><td>$\phi=180^{\circ},K\geq 5.0$</td><td>(50)</td></tr><tr><td>θy</td><td>$\phi=90^{\circ},K\geq 5.0$</td><td>(40)</td></tr><tr><td>$\theta y'$</td><td>$\phi=270^{\circ},K\geq 5.0$</td><td>(80)</td></tr></table> ↓ <table><tr><th>ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>TYP.</th></tr><tr><td rowspan="4">Viewing Area</td><td>θx</td><td>$\phi=0^{\circ},K\geq 5.0$</td><td>65</td></tr><tr><td>$\theta x'$</td><td>$\phi=180^{\circ},K\geq 5.0$</td><td>65</td></tr><tr><td>θy</td><td>$\phi=90^{\circ},K\geq 5.0$</td><td>70</td></tr><tr><td>$\theta y'$</td><td>$\phi=270^{\circ},K\geq 5.0$</td><td>50</td></tr></table>	ITEM	SYMBOL	CONDITION	TYP.	Viewing Area	θx	$\phi=0^{\circ},K\geq 5.0$	(50)	$\theta x'$	$\phi=180^{\circ},K\geq 5.0$	(50)	θy	$\phi=90^{\circ},K\geq 5.0$	(40)	$\theta y'$	$\phi=270^{\circ},K\geq 5.0$	(80)	ITEM	SYMBOL	CONDITION	TYP.	Viewing Area	θx	$\phi=0^{\circ},K\geq 5.0$	65	$\theta x'$	$\phi=180^{\circ},K\geq 5.0$	65	θy	$\phi=90^{\circ},K\geq 5.0$	70	$\theta y'$	$\phi=270^{\circ},K\geq 5.0$	50
	ITEM	SYMBOL	CONDITION	TYP.																																
	Viewing Area	θx	$\phi=0^{\circ},K\geq 5.0$	(50)																																
$\theta x'$		$\phi=180^{\circ},K\geq 5.0$	(50)																																	
θy		$\phi=90^{\circ},K\geq 5.0$	(40)																																	
$\theta y'$		$\phi=270^{\circ},K\geq 5.0$	(80)																																	
ITEM	SYMBOL	CONDITION	TYP.																																	
Viewing Area	θx	$\phi=0^{\circ},K\geq 5.0$	65																																	
	$\theta x'$	$\phi=180^{\circ},K\geq 5.0$	65																																	
	θy	$\phi=90^{\circ},K\geq 5.0$	70																																	
	$\theta y'$	$\phi=270^{\circ},K\geq 5.0$	50																																	
7B64PS 2708- TX14D11VM1CAA-2 PAGE 8-5/5	8.5 INTERNAL PIN CONNECTION CORRECTED CN1 JAE : FA5B040HP1 → FA5B040HF1																																			
7B64PS 2709- TX14D11VM1CAA-2 PAGE 9-2/2	9. DIMENSIONAL OUTLINE CORRECTED : The dimension of CN1 21.25 → (17.35)																																			
May.18.'04	7B64PS 2704- TX14D11VM1CAA-3 PAGE 4-1/1	4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS <table><tr><th rowspan="2">I T E M</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th><th rowspan="2">COMMENT</th></tr><tr><th>MIN.</th><th>MAX.</th><th>MIN.</th><th>MAX.</th></tr><tr><td>Temperature</td><td>-10</td><td>70</td><td>-30</td><td>80</td><td>(Note 2,3,6,7,8,10)</td></tr></table> ↓ <table><tr><th rowspan="2">I T E M</th><th colspan="2">OPERATING</th><th colspan="2">STORAGE</th><th rowspan="2">COMMENT</th></tr><tr><th>MIN.</th><th>MAX.</th><th>MIN.</th><th>MAX.</th></tr><tr><td>Temperature</td><td>-20</td><td>70</td><td>-30</td><td>80</td><td>(Note 2,3,6,7,8,10,12)</td></tr></table> Note 2 : Ta at -30℃ for 48h , at 80℃ for 100h. ↓ Note 2 : For storage condition Ta at -30℃ < 48h , at 80℃ < 100h. For operating condition Ta at -20℃ < 100h Addendum : Note 12 : When LCM be operated less than 0℃ , the lift time of CFL will be reduced . The rise time of CFL ON will be longer when the ambient temperature below 0℃ and confirming the characteristics of inverter is necessary .	I T E M	OPERATING		STORAGE		COMMENT	MIN.	MAX.	MIN.	MAX.	Temperature	-10	70	-30	80	(Note 2,3,6,7,8,10)	I T E M	OPERATING		STORAGE		COMMENT	MIN.	MAX.	MIN.	MAX.	Temperature	-20	70	-30	80	(Note 2,3,6,7,8,10,12)		
		I T E M		OPERATING		STORAGE			COMMENT																											
			MIN.	MAX.	MIN.	MAX.																														
		Temperature	-10	70	-30	80	(Note 2,3,6,7,8,10)																													
I T E M	OPERATING		STORAGE		COMMENT																															
	MIN.	MAX.	MIN.	MAX.																																
Temperature	-20	70	-30	80	(Note 2,3,6,7,8,10,12)																															

RECORD OF REVISION

DATE	SHEET No.	SUMMARY																																													
May.18.'04	7B64PS 2706- TX14D11VM1CAA-3 PAGE 6-1/3	6.1 OPTICAL CHARACTERISTICS OF LCD																																													
		<table><tr><th colspan="2">ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>MIN.</th><th>TYP.</th><th>MAX.</th></tr><tr><td rowspan="8">Color Tone (Primary Color)</td><td rowspan="2">Red</td><td>x</td><td rowspan="8">$\phi=0^{\circ}, \theta=0^{\circ}$</td><td>-</td><td>0.61</td><td>-</td></tr><tr><td>y</td><td>-</td><td>0.33</td><td>-</td></tr><tr><td rowspan="2">Green</td><td>x</td><td>-</td><td>0.30</td><td>-</td></tr><tr><td>y</td><td>-</td><td>0.57</td><td>-</td></tr><tr><td rowspan="2">Blue</td><td>x</td><td>-</td><td>0.14</td><td>-</td></tr><tr><td>y</td><td>-</td><td>0.08</td><td>-</td></tr><tr><td rowspan="2">White</td><td>x</td><td>-</td><td>0.29</td><td>-</td></tr><tr><td>y</td><td>-</td><td>0.29</td><td>-</td></tr></table>	ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	Color Tone (Primary Color)	Red	x	$\phi=0^{\circ}, \theta=0^{\circ}$	-	0.61	-	y	-	0.33	-	Green	x	-	0.30	-	y	-	0.57	-	Blue	x	-	0.14	-	y	-	0.08	-	White	x	-	0.29	-	y	-	0.29	-
		ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.																																							
Color Tone (Primary Color)	Red	x	$\phi=0^{\circ}, \theta=0^{\circ}$	-	0.61	-																																									
		y		-	0.33	-																																									
	Green	x		-	0.30	-																																									
		y		-	0.57	-																																									
	Blue	x		-	0.14	-																																									
		y		-	0.08	-																																									
	White	x		-	0.29	-																																									
		y		-	0.29	-																																									
↓ <table><tr><th colspan="2">ITEM</th><th>SYMBOL</th><th>CONDITION</th><th>MIN.</th><th>TYP.</th><th>MAX.</th></tr><tr><td rowspan="8">Color Tone (Primary Color)</td><td rowspan="2">Red</td><td>x</td><td rowspan="8">$\phi=0^{\circ}, \theta=0^{\circ}$</td><td>0.56</td><td>0.61</td><td>0.66</td></tr><tr><td>y</td><td>0.28</td><td>0.33</td><td>0.38</td></tr><tr><td rowspan="2">Green</td><td>x</td><td>0.25</td><td>0.30</td><td>0.35</td></tr><tr><td>y</td><td>0.52</td><td>0.57</td><td>0.62</td></tr><tr><td rowspan="2">Blue</td><td>x</td><td>0.09</td><td>0.14</td><td>0.19</td></tr><tr><td>y</td><td>0.03</td><td>0.08</td><td>0.13</td></tr><tr><td rowspan="2">White</td><td>x</td><td>0.24</td><td>0.29</td><td>0.34</td></tr><tr><td>y</td><td>0.24</td><td>0.29</td><td>0.34</td></tr></table>	ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	Color Tone (Primary Color)	Red	x	$\phi=0^{\circ}, \theta=0^{\circ}$	0.56	0.61	0.66	y	0.28	0.33	0.38	Green	x	0.25	0.30	0.35	y	0.52	0.57	0.62	Blue	x	0.09	0.14	0.19	y	0.03	0.08	0.13	White	x	0.24	0.29	0.34	y	0.24	0.29	0.34		
ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.																																									
Color Tone (Primary Color)	Red	x	$\phi=0^{\circ}, \theta=0^{\circ}$	0.56	0.61	0.66																																									
		y		0.28	0.33	0.38																																									
	Green	x		0.25	0.30	0.35																																									
		y		0.52	0.57	0.62																																									
	Blue	x		0.09	0.14	0.19																																									
		y		0.03	0.08	0.13																																									
	White	x		0.24	0.29	0.34																																									
		y		0.24	0.29	0.34																																									
May.13,'08	7B64PS 2705- TX14D11VM1CAA-4 PAGE 5-1/3	5.2.3 MECHANICAL CHARACTERISTICS																																													
		Changed:																																													
		<table><tr><th>ITEM</th><th>SPECIFICATION</th><th>NOTE</th></tr><tr><td>Pen Input Pressure</td><td>0.1~0.8N</td><td>R0.8, Polyacetal Pen</td></tr><tr><td>Finger</td><td>0.1~1.0N</td><td>R8, Silicon Rubber</td></tr></table> ↓ <table><tr><th>ITEM</th><th>SPECIFICATION</th><th>NOTE</th></tr><tr><td>Pen Input Pressure</td><td>1.2N max.</td><td>R0.8, Polyacetal Pen</td></tr><tr><td>Finger</td><td>1.2N max.</td><td>R8, Silicon Rubber</td></tr></table>	ITEM	SPECIFICATION	NOTE	Pen Input Pressure	0.1~0.8N	R0.8, Polyacetal Pen	Finger	0.1~1.0N	R8, Silicon Rubber	ITEM	SPECIFICATION	NOTE	Pen Input Pressure	1.2N max.	R0.8, Polyacetal Pen	Finger	1.2N max.	R8, Silicon Rubber																											
ITEM	SPECIFICATION	NOTE																																													
Pen Input Pressure	0.1~0.8N	R0.8, Polyacetal Pen																																													
Finger	0.1~1.0N	R8, Silicon Rubber																																													
ITEM	SPECIFICATION	NOTE																																													
Pen Input Pressure	1.2N max.	R0.8, Polyacetal Pen																																													
Finger	1.2N max.	R8, Silicon Rubber																																													

RECORD OF REVISION

DATE	SHEET No.	SUMMARY					
May.13,'08	7B64PS 2708- TX14D11VM1CAA-4 PAGE 8-5/5	8.5 INTERNAL PIN CONNECTION Changed : CN1 JAE : FA5B040HF1(Sn plating) → FA5B040HP1R3000 (Au plating)					
	7B64PS 2709- TX14D11VM1CAA-4 PAGE 9-2/2	9. DIMENSIONAL OUTLINE The lot label size and position is changed.					
	7B64PS 2712- TX14D11VM1CAA-4 PAGE 12-1/1	12.1 LOT MARK Changed : 5 digits for production number ↓ 6 digits for production number 12.3 LOCATION OF LOT MARK Changed : Lot No. & Production Control No. → (90) HITACHI TX14D11VM1CAA 3031T_00005 MADE IN TAIWAN P.O.C. 高電圧注意 CAUTION HIGH VOLTAGE (26) TX14D11VM1CAA REV: 8041T (5D) 123456 HITACHI MADE IN TAIWAN (14) Added : 12.4 REVISION(Rev.) CONTROL <table><tr><th>Rev No.</th><th>ITEM</th></tr><tr><td>-</td><td>CN1 JAE : FA5B040HF1</td></tr><tr><td>A</td><td>CN1 JAE : FA5B040HP1R3000</td></tr></table>	Rev No.	ITEM	-	CN1 JAE : FA5B040HF1	A
Rev No.	ITEM						
-	CN1 JAE : FA5B040HF1						
A	CN1 JAE : FA5B040HP1R3000						
Nov.12,'10	7B64PS 2710- TX14D11VM1CAA-5 PAGE 10-5/5	10.3 APPEARANCE SPECIFICATION Changed : Blistering Puffiness 0.4mm max. → 0.6mm max.					
May 01,'12	All pages	Company name changed: KAOHSIUNG HITACHI ELECTRONICS CO.,LTD. ↓ KAOHSIUNG OPTO-ELECTRONICS INC.					

RECORD OF REVISION

DATE	SHEET No.	SUMMARY								
Jun. 18,'12	7B64PS-2705- TX14D11VM1CAA-7 Page 5-1/3	5.2.2 ELECTRICAL CHARACTERISTICS Changed : <table><tr><td>ITEM</td><td>SPECIFICATION</td></tr><tr><td>XR-XL</td><td>210~640Ω</td></tr></table> ↓ <table><tr><td>ITEM</td><td>CONDUCTIVE RESISTANCE</td></tr><tr><td>XR-XL</td><td>310~950Ω</td></tr></table>	ITEM	SPECIFICATION	XR-XL	210~640Ω	ITEM	CONDUCTIVE RESISTANCE	XR-XL	310~950Ω
	ITEM	SPECIFICATION								
XR-XL	210~640Ω									
ITEM	CONDUCTIVE RESISTANCE									
XR-XL	310~950Ω									
	7B64PS-2705- TX14D11VM1CAA-7 Page 5-2/3	5.2.4 OPTICAL CHARASTERISTICS Changed : (a) X axis linearity testing method , 100g.→150g.								

3.GENERAL DATA

(1) Part Name	TX14D11VM1CAA
(2) Module Dimensions	167.0(W)mm x 109.0(H)mm x (10.9)(D)mm max.
(3) LCD Active Area	115.2(W)mm x 86.4(H)mm
(4) Dot Pitch	0.12(W)mm x 3(R,G,B)(W) x 0.36(H)mm
(5) Resolution	320x3(R,G,B))(W)x240(H) dots
(6) Color Pixel Arrangement	R,G,B Vertical stripe
(7) LCD Type	Transmissive Color TFT LCD (Normally White)
(8) Display Type	Active Matrix
(9) Number of Colors	262k Colors (R,G,B 6bit parallel)
(10) Backlight	Cold Cathode Fluorescent Tube (U type CFL) x 1
(11) Weight	(220)g
(12) Interface	40pin (C-MOS)
(13) Power Supply Voltage	3.3V only (Include Timing Controller and Power Unit)
(14) View Direction	6 O'clock
(15) Touch Panel	Resistance type The surface is antiglare type

4. ABSOLUTE MAXIMUM RATINGS

4.1 ELECTRICAL ABSOLUTE MAXIMUM RATINGS OF LCD

VSS=0V

ITEM	SYMBOL	MIN.	MAX.	UNIT	REMARKS
Power Supply for Logic	VDD	-0.3	4.0	V	
Input Voltage	VI	-0.2	VDD+0.2		(Note 1)
Input Current	Ii	0	1	A	
Static Electricity	VESD0	-	±100	V	(Note 2,3)
	VESD1	-	±8	kV	(Note 2,4)

Note 1 : DTMG,DCLK,RD0~RD5,GD0~GD5,BD0~BD5.

Note 2 : 200pF-250Ω 25℃ - 70%RH

Note 3 : Interface Pin Connector.

Note 4 : The surface of metal bezel and LCD panel .

4.2 ENVIRONMENTAL ABSOLUTE MAXIMUM RATINGS

I T E M	OPERATING		STORAGE		REMARKS
	MIN.	MAX.	MIN.	MAX.	
Temperature	-20	70	-30	80	(Note 2,3,6,7,8,10,12)
Humidity	(Note 1)		(Note 1)		Without condensation
Vibration	-	4.9m/s ² (0.5G)	-	19.6m/s ² (2G) (Note 5)	(Note 4)
Shock	-	29.4m/s ² (3G)	-	490m/s ² (50G) (Note 5)	XYZ directions (Note 9)
Corrosive Gas	Not Acceptable		Not Acceptable		
CFL Lift Time	50,000 h (Average) (Note 11)		-		at 25℃ , IL=4.0mA max.

Note 1 : Ta ≤ 40℃ : 85%RH max.

Ta > 40℃ : Absolute humidity must be lower than the humidity of 85%RH at 40℃.

Note 2 : For storage condition Ta at -30℃ < 48h , at 80℃ < 100h.

For operating condition Ta at -20℃ < 100h

Note 3 : Background color changes slightly depending on ambient temperature.

This phenomenon is reversible.

Note 4 : 5Hz~100Hz(Except resonance frequency)

Note 5 : This LCM will resume normal operation after finishing the test.

Note 6 : The response time will be slower as low temperature.

Note 7 : Only operation is guaranteed at operating temperature. Contrast, response time, another display quality are evaluated at +25℃.

Note 8 : When LCM is operated over 60℃ ambient temperature , the ICFL of LCM should be adjusted to 3mA max.

Note 9 : Pulse Width : 10ms

Note 10 : This is panel surface temperature , not ambient temperature.

Note 11 : When brightness reached 50% of initial brightness.

Note 12 : When LCM be operated less than 0℃ , the lift time of CFL will be reduced .

The rise time of CFL ON will be longer when the ambient temperature below 0℃ and confirming the characteristics of inverter is necessary .

5. ELECTRICAL CHARACTERISTICS

5.1 ELECTRICAL CHARACTERISTICS OF LCD

Ta=25°C, VSS=0V

ITEM	SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT
Power Supply Voltage	VDD	-	3.0	3.3	3.6	V
Input Voltage for Logic (Note 1)	VI	"H" level	2.0	-	VDD	V
		"L" level	VSS	-	0.8	
Power Supply Current (Note 2)	IDD	VDD-VSS=3.3V	-	(150)	-	mA
Vsync Frequency	fV	-	52	60	68	Hz
Hsync Frequency	fH	-	13.1	15.2	17.7	kHz
DCLK Frequency	fCLK	-	4.85	5.85	7.0	MHz

Note 1 : DTMG,DCLK, RD0~RD5,GD0~GD5,BD0~BD5.

Note 2 : fV=60Hz,Ta=25°C, Pattern used as display pattern : All Black.

Note 3 : Need to make sure of flickering and rippling of display when setting the frame frequency in your set.

5.2 ELECTRICAL CHARACTERISTICS OF TOUCH PANEL

5.2.1 OPERATING CONDITION

ITEM	SPECIFICATION
Operating Voltage	5VDC max.

5.2.2 ELECTRICAL CHARACTERISTICS

ITEM		SPECIFICATION	REMARKS
Resistance Between Terminal	XR-XL	310~950Ω	
	YT-YB	240~680Ω	
Insulation Resistance	X-Y	20MΩ min.	Operating Voltage : 25V DC
Linearity	X	1.5% max.	(Note 1)
	Y	1.5% max.	
Chattering		10ms max.	

5.2.3 MECHANICAL CHARACTERISTICS

ITEM	SPECIFICATION	REMARKS
Pen Input Pressure	1.2N max.	R0.8, Polyacetal Pen
Finger	1.2N max.	R8, Silicon Rubber
Surface Hardness	2H min.	


5.2.4 OPTICAL CHARACTERISTICS

ITEM	SPECIFICATION	REMARKS
Transparency	76% min	

Note 1 : Operating Voltage 5V DC.

Note 2 : Test Condition.

(a) Y axis linearity testing method , 150g , VX1-VX2=5V , VOUT=VY1.

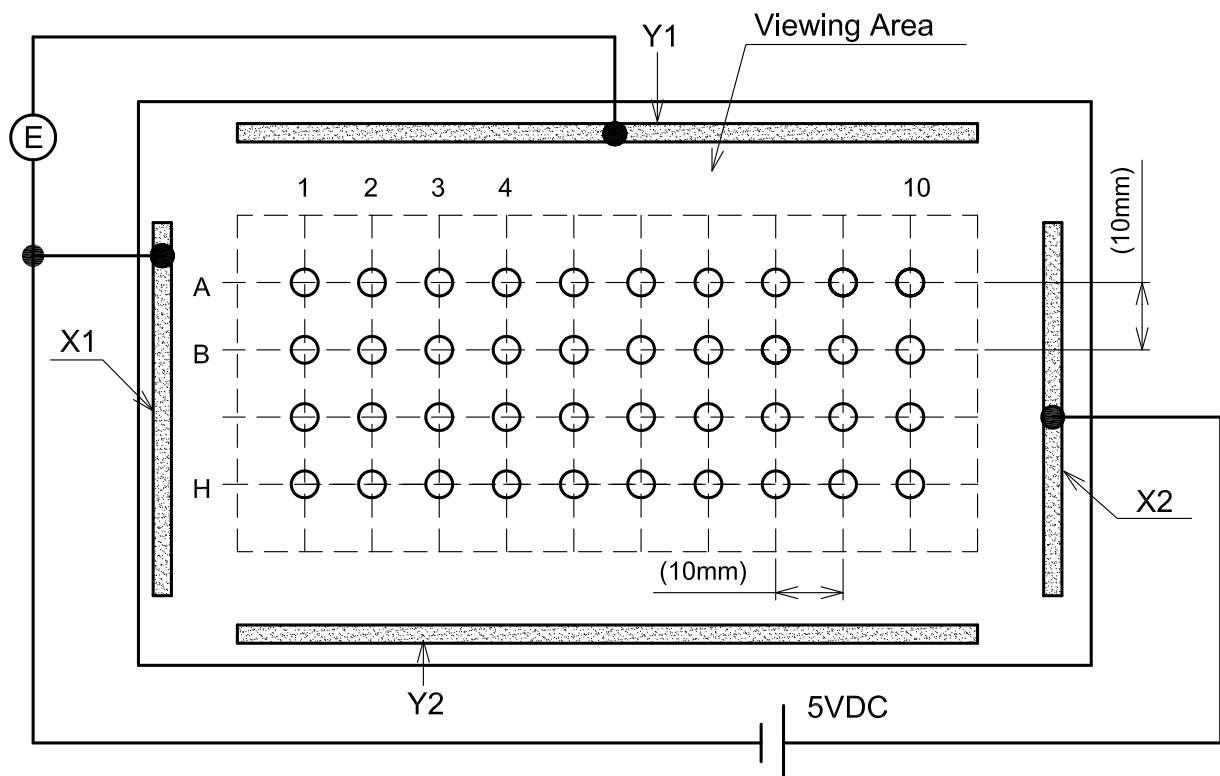


(b) X axis linearity testing method , VY1-VY2=5V , VOUT=VX1.

Note 3 : Calculation

(a) Y axis linearity

$$\text{Linearity} = \frac{\Delta E \text{ max.}}{EA - EH} \times 100(\%)$$

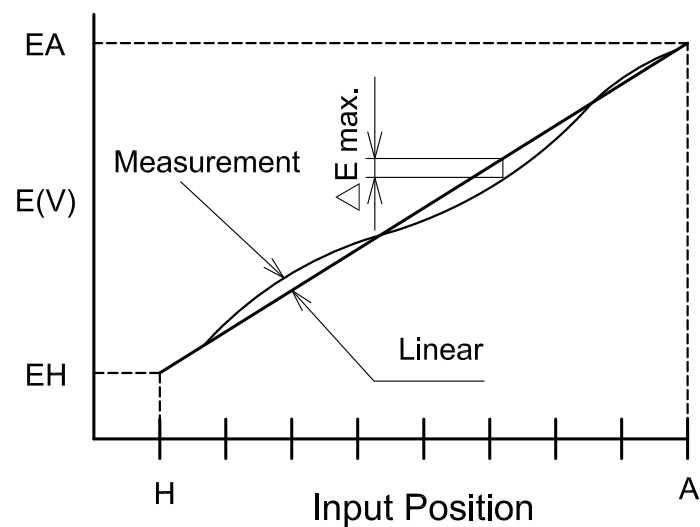

5.3 ELECTRICAL CHARACTERISTICS OF BACKLIGHT

ITEM	SYMBOL	MIN.	TYP.	MAX.	UNIT	REMARKS
Lamp Voltage	VL	-	760	-	Vrms	Ta=25°C
Frequency	fL	-	55	-	kHz	
Lamp Current (1Lamp)(Note 6)	IL	3.0	4.0	6.0	mA	Ta=25°C
Starting Discharge Voltage	VS (Note 2)	1300	-	-	Vrms	Ta=5°C

Note 1 : Please design your lamp driving circuit (inverter) according to the above specifications, and inform KOE about it.

Note 2 : Starting discharge voltage is increased when LCM is operating under low temperature.

Please check the characteristics of your inverter before applying to your set.

Note 3 : Average life time of CFL will be decreased when LCM is operating under low temperature.

Note 4 : Under lower driving frequency of an inverter, a certain Backlight system (CFL & CFL reflection sheet) may generate a sound noise. Before designing the inverter, please consider the driving frequency and noise.

Note 5 : When IL is over 6.0mA, it may cause uneven contrast near CFL location, due to heat dispersion form CFL.

Note 6 : We recommend to equip protection circuit (To stop output) which works under abnormal operation to the inverter for CFL

6. OPTICAL CHARACTERISTICS

6.1 OPTICAL CHARACTERISTICS OF LCD

Ta=25°C (Backlight on)

ITEM		SYMBOL	CONDITION	MIN.	TYP.	MAX.	UNIT	REMARKS
Viewing Area		θx	$\phi=0^{\circ}, K \geq 5.0$	-	65	-	deg	Note1~5
		$\theta x'$	$\phi=180^{\circ}, K \geq 5.0$		65		deg	Note1~5
		θy	$\phi=90^{\circ}, K \geq 5.0$		70		deg	Note1~5
		$\theta y'$	$\phi=270^{\circ}, K \geq 5.0$	-	50	-	deg	Note1~5
Contrast Ratio		K	$\phi=0^{\circ}, \theta=0^{\circ}$	120	350	-	-	Note5
Response Time (rise+fall)		tr+tf	$\phi=0^{\circ}, \theta=0^{\circ}$	-	(45)	-	ms	Note6
Color Tone (Primary Color)	Red	x	$\phi=0^{\circ}, \theta=0^{\circ}$	0.56	0.61	0.66	-	
		y		0.28	0.33	0.38	-	
	Green	x		0.25	0.30	0.35	-	
		y		0.52	0.57	0.62	-	
	Blue	x		0.09	0.14	0.19	-	
		y		0.03	0.08	0.13	-	
	White	x		0.24	0.29	0.34	-	
		y		0.24	0.29	0.34	-	

(Measurement condition : KOE standard)

(Note 3~6) : See next page.


Note 1 : Driving Condition

Display Pattern : White Raster


ICFL Current : 4mA

Note 2 : Measurement Condition

(Transmittance)

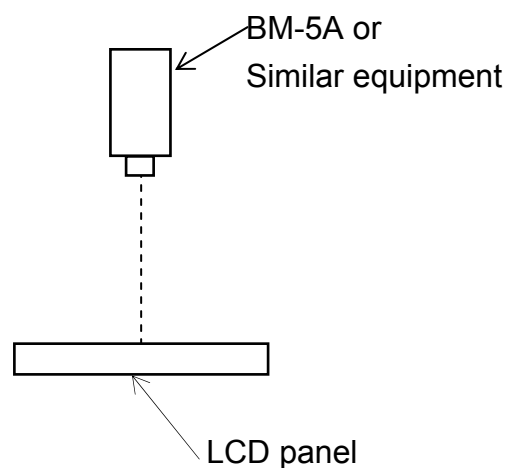


Note 3 : Definition of θ and ϕ
(Normal)
Viewing direction

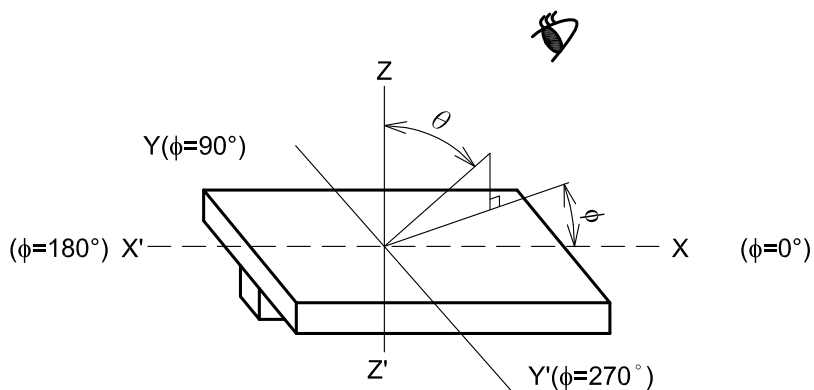


Note 5 : Definition of contrast "K"

$$K = \frac{\text{White Brightness}}{\text{Black Brightness}}$$



Note 4 : Definition of Viewing angle ϕ_1 and ϕ_2

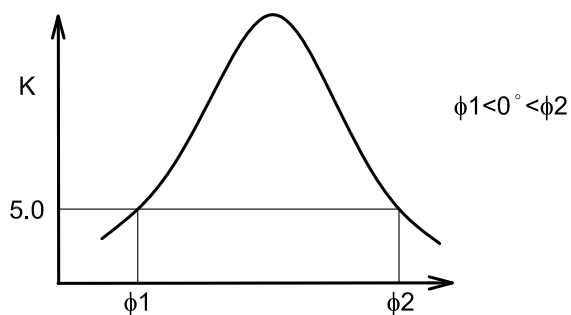

Contrast ratio "K" vs Viewing angle " ϕ "

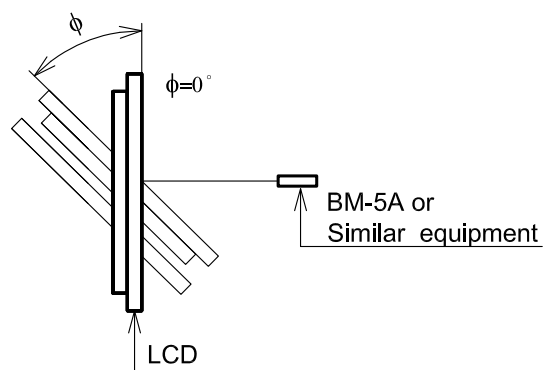

Note 6 : Definition optical response time

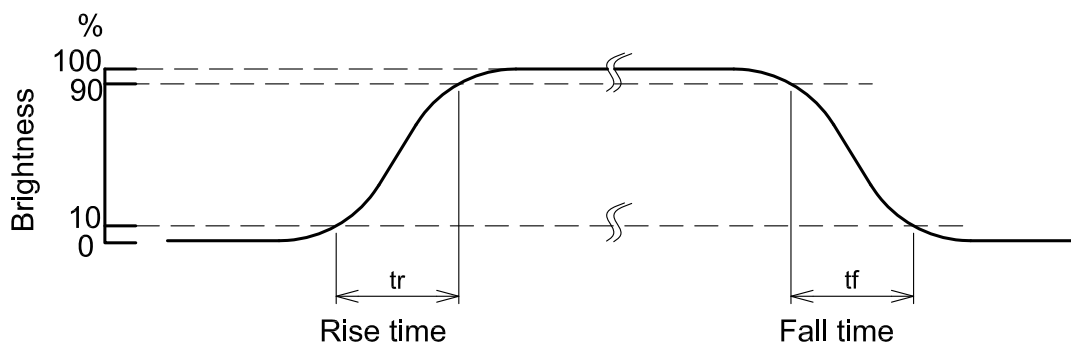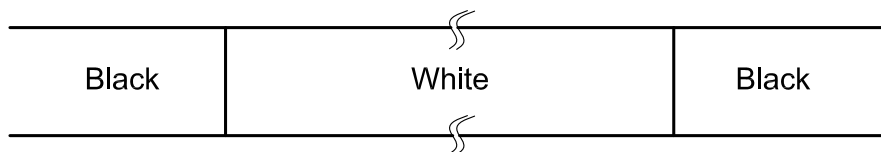

6.2 OPTICAL CHARACTERISTICS OF BACKLIGHT

ITEM	MIN.	TYP.	MAX.	UNIT	REMARKS
Brightness	-	280	-	cd/m ²	IL=4.0 mA (Note 1,2)
Rise Time	-	3	-	Minute	IL=4.0 mA Brightness 80%
Brightness Uniformity	-	-	±25	%	Under mentioned (Note 1,3)

(Measurement condition : KOE standard)

CFL: 0h operation, Ta=25°C


Display data should all be "ON"

Note 1 : Measurement after 10 minutes from CFL operating.

Average value of 9 points (Note 3)

Note 2 : Brightness control : 100%.


Note 3 : Measurement of the following 9 places on the display.

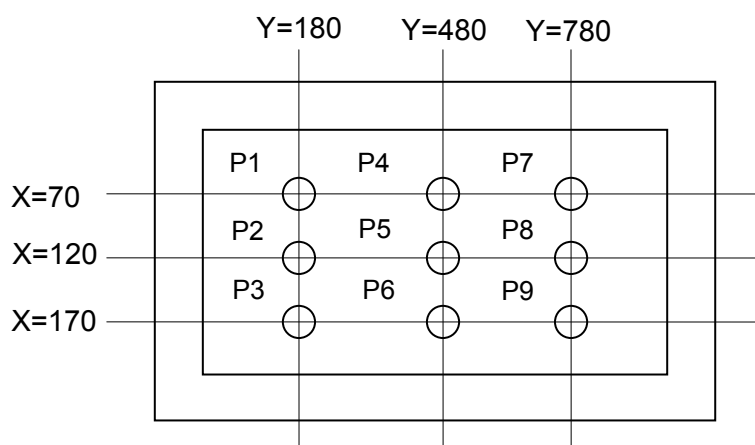

Note 4 : Definition of the brightness tolerance.

$$\left(\frac{\text{Max. brightness or Min. brightness} - \text{Average brightness}}{\text{Average brightness}} \right) \times 100\%$$

7.BLOCK DIAGRAM

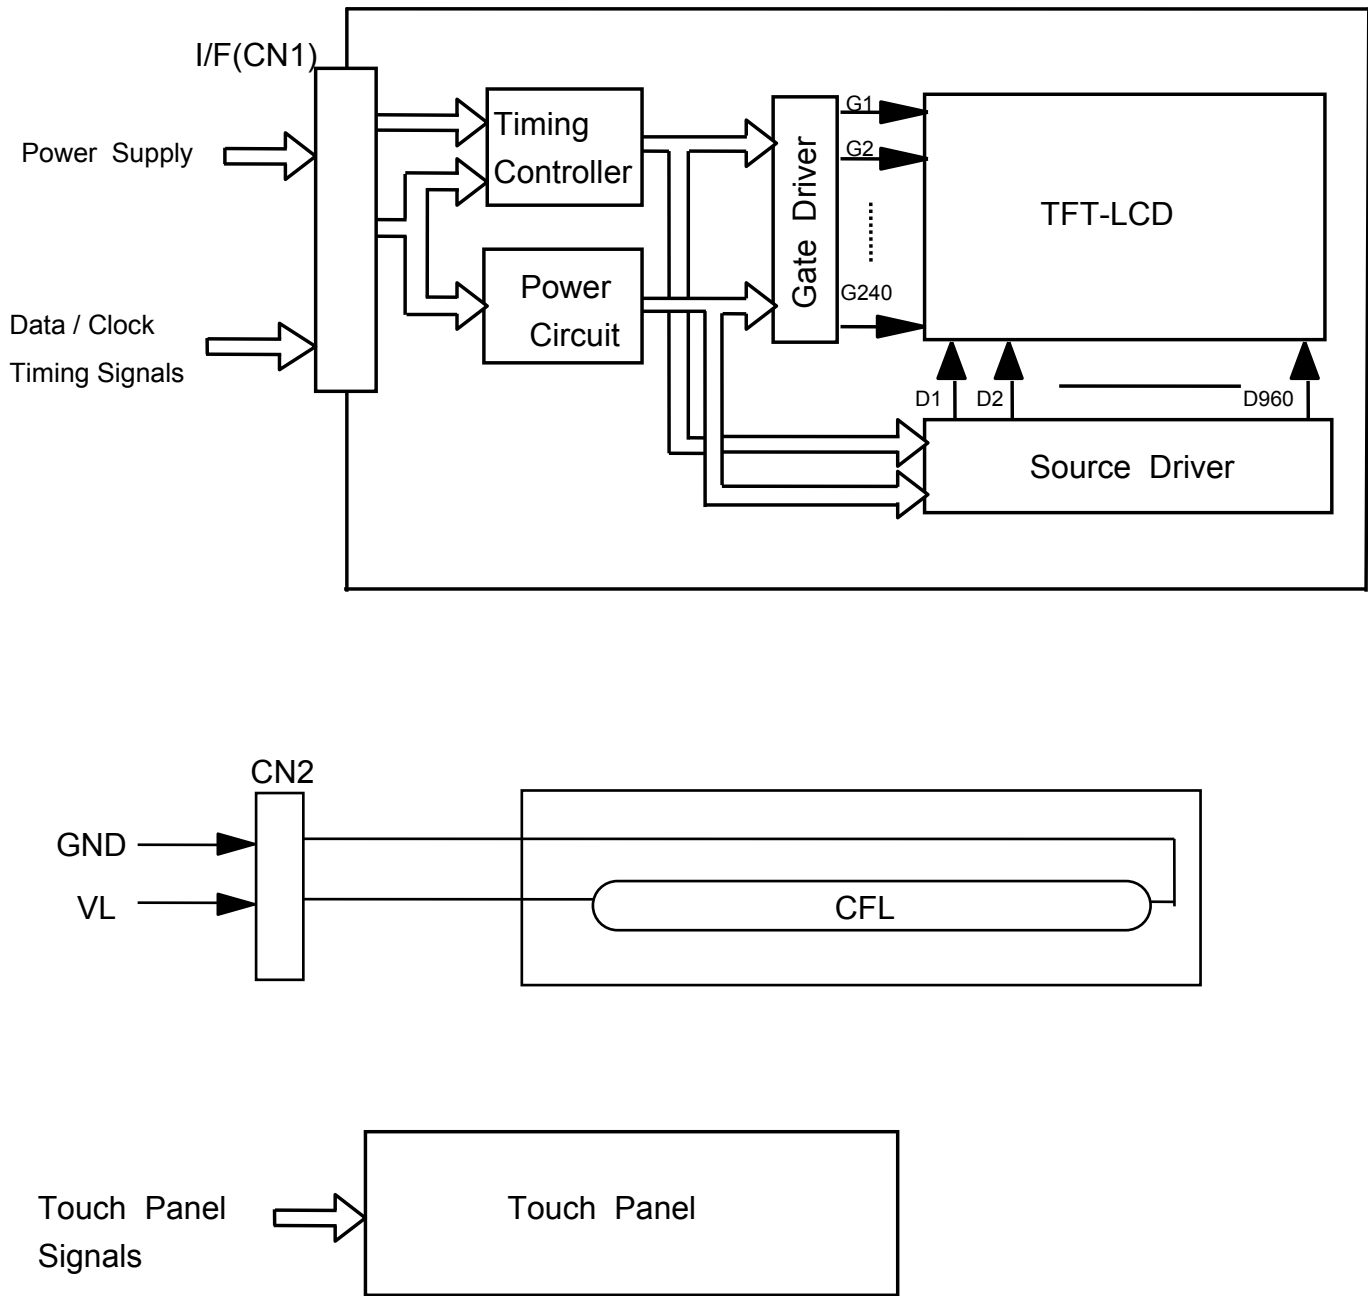

8.INTERFACE TIMING


8.1 INTERFACE TIMING

ITEM		MIN.	TYP.	MAX.	UNIT	SYMBOL	REMARKS
DCLK	Cycle time	142	171	206	ns	t _{CLK}	
	Low level Width	12	-	-		t _{WCL}	
	High level Width	12	-	-		t _{WCH}	
	Rise time	-	-	25		t _{rCLK}	
	Fall time	-	-	25		t _{fCLK}	
	Duty	0.45	0.5	0.55	-	D	D= t _{CLKL} / CLK
Hsync	Set up time	5			ns	t _{SH}	for DCLK
	Hold time	10				t _{HH}	
	Cycle	370	385	397	t _{CLK}	t _{HP}	
	Valid width	4	5	-		t _{WH}	
	Rise/Fall time	-	-	30	ns	t _{HR} , t _{HF}	
Vsync	Set up	0	-	-	t _{CLK}	t _{SV}	for Hsync
	Hold	2	-	-		t _{HV}	
	Cycle	251	253	261	t _{HP}	t _{VP}	
	Valid width	2	2			t _{WV}	
	Rise/Fall time	-	-	50	ns	t _{VR} , t _{VF}	
DTMG	Set up time	5	-	-	ns	t _{SI}	for DCLK
	Hold time	10	-	-		t _{HI}	
	Rise/Fall time	-	-	30	ns	t _{IR} , t _{IF}	
	Horizontal back porch	28	35	-	t _{CLK}	t _{HBP}	
	Horizontal front porch	22	30	-		t _{HFP}	
	Vertical back porch	6	7	-	t _{HP}	t _{VBP}	
	Vertical front porch	5	6	-		t _{VFP}	
Data	Set up time	5	-	-	ns	t _{SD}	for DCLK
	Hold time	10	-	-		t _{HD}	
	Rise/Fall time	-	-	25	ns	t _{DR} , t _{DF}	

Note : Vsync Cycle No. should be set to odd.

8.2 Timing Chart


(Data is latched negative edge trigger of DCLK)

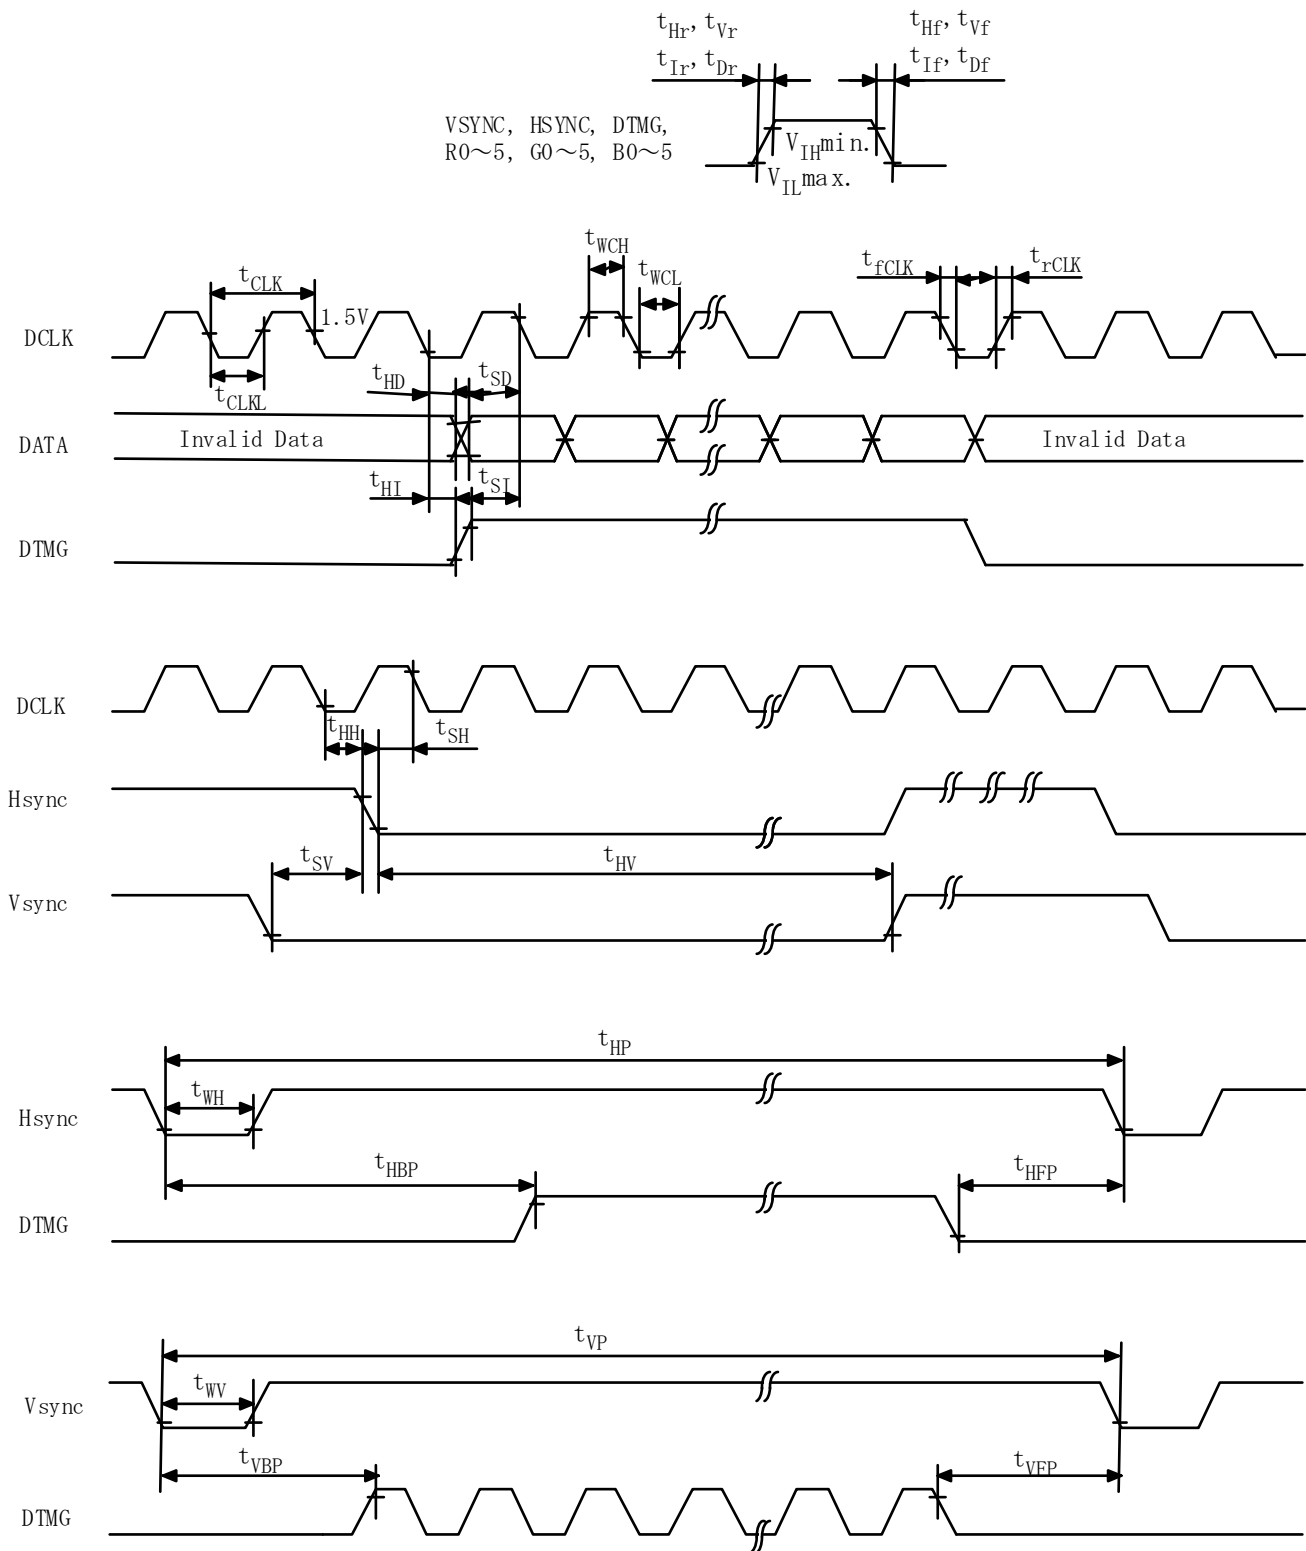

Note 1 : DTMG is definition of the above timing for Hsync and Vsync.

Note 2 : No matter when Hsync and Vsync is inputted, this LCM can be drove only DTMG Signal. DTMG should be set to low level when it is not input valid data.

8.3 POWER ON/OFF SEQUENCE

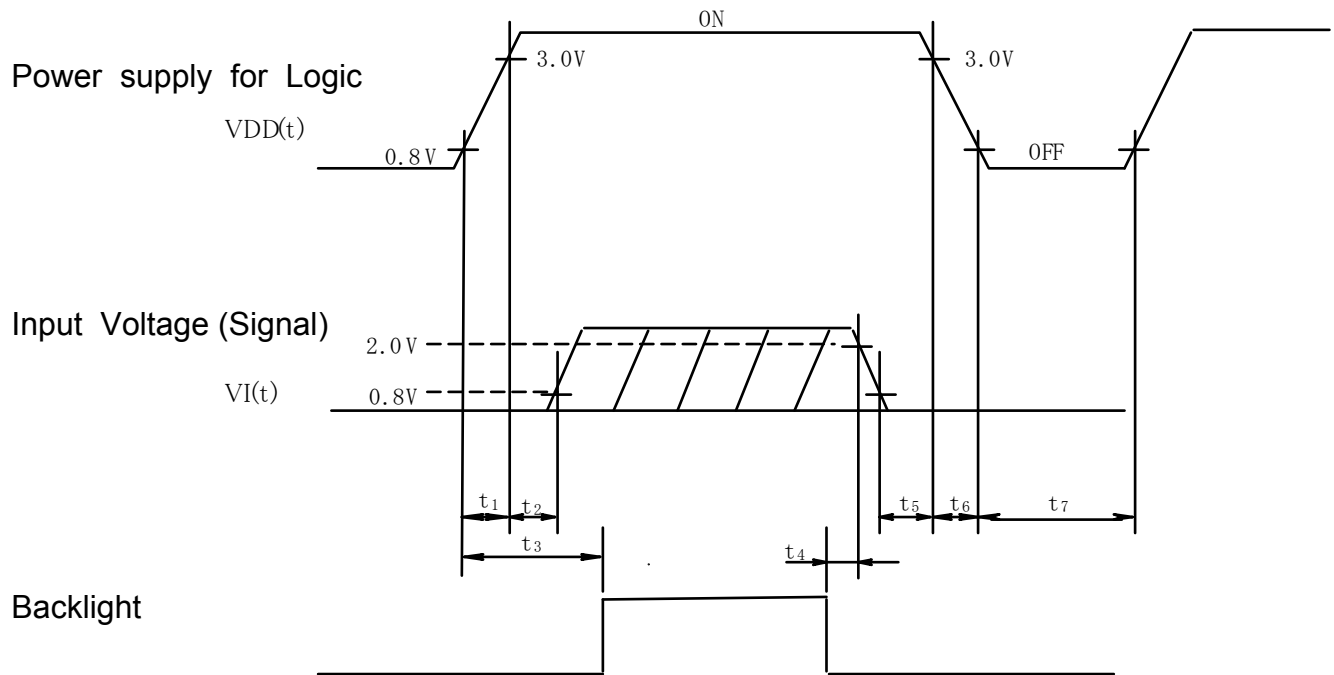

POWER ON

$$\begin{aligned} t_1 &\leq 15\text{ms} \\ 0\text{ms} < t_2 &\leq 45\text{ms} \\ 0.1\text{s} &\leq t_3 \end{aligned}$$

POWER OFF

$$\begin{aligned} 5\text{ms} &\leq t_4 \\ 0\text{ms} &\leq t_5 \leq 45\text{ms} \\ 0\text{ms} &\leq t_6 \leq 20\text{ms} \\ 0.4\text{s} &\leq t_7 \end{aligned}$$

Note 1 : $0\text{V} \leq VI(t) \leq VDD(t)$

VI(t) and VDD(t) is a surfeit of condition for power on/off.

Note 2 : Input Voltage(Signal) should not be set high impedance when power on.

8.4 RELATIONSHIP BETWEEN DISPLAYED COLOR AND INPUT DATA

	COLOR & GRAY SCALE	GRAY SCALE LEVELS	DATA SIGNAL																	
			R0	R1	R2	R3	R4	R5	G0	G1	G2	G3	G4	G5	B0	B1	B2	B3	B4	B5
Basic Color	Black	-	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue	-	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Green	-	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Cyan	-	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Red	-	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Magenta	-	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	-	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	-	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Red	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↓		↓																	
	↓		↓																	
	Brighter	GS61	1	0	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	↓	GS62	0	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red	GS63	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
Green	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0
	↓		↓																	
	↓		↓																	
	Brighter	GS61	0	0	0	0	0	0	1	0	1	1	1	1	0	0	0	0	0	0
	↓	GS62	0	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0
	Green	GS63	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
Blue	Black	GS0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	↑	GS1	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0
	Darker	GS2	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0
	↓		↓																	
	↓		↓																	
	Brighter	GS61	0	0	0	0	0	0	0	0	0	0	0	0	1	0	1	1	1	1
	↓	GS62	0	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1
	Blue	GS63	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

8.5 INTERNAL PIN CONNECTION

CN1 JAE : FA5B040HP1R3000(Au plating) (Suitable FPC : $t0.3\pm0.03\text{mm}$, $0.5\pm0.03\text{mm}$ pitch)


PIN No.	SIGNAL	FUNCTION
1	VDD	Power Supply for Logic
2	VDD	Power Supply for Logic
3	VDD	Power Supply for Logic
4	VDD	Power Supply for Logic
5	NC	No Connection
6	DTMG	Timing Signal for Data
7	VSS	GND
8	DCLK	Dot Clock
9	VSS	GND
10	NC	No Connection
11	VSS	GND
12	B5	Blue Data
13	B4	
14	B3	
15	VSS	GND
16	B2	Blue Data
17	B1	
18	B0	
19	VSS	GND
20	G5	Green Data
21	G4	
22	G3	
23	VSS	GND
24	G2	Green Data
25	G1	
26	G0	
27	VSS	GND
28	R5	Red Data
29	R4	
30	R3	
31	VSS	GND
32	R2	Red Data
33	R1	
34	R0	
35	(IC)	No Connection
36	VSS	GND
37	NC	No Connection
38	NC	No Connection
39	NC	No Connection
40	NC	No Connection

CN2 JST Housing : BHR-03VS-1

PIN No.	SIGNAL	LEVEL	FUNCTION
1	VCFL	-	Power Supply for CFL
2	NC	-	No connection
3	VSS	-	GND for CFL


9. OUTLINE DIMENSIONS

9.1 FRONT VIEW

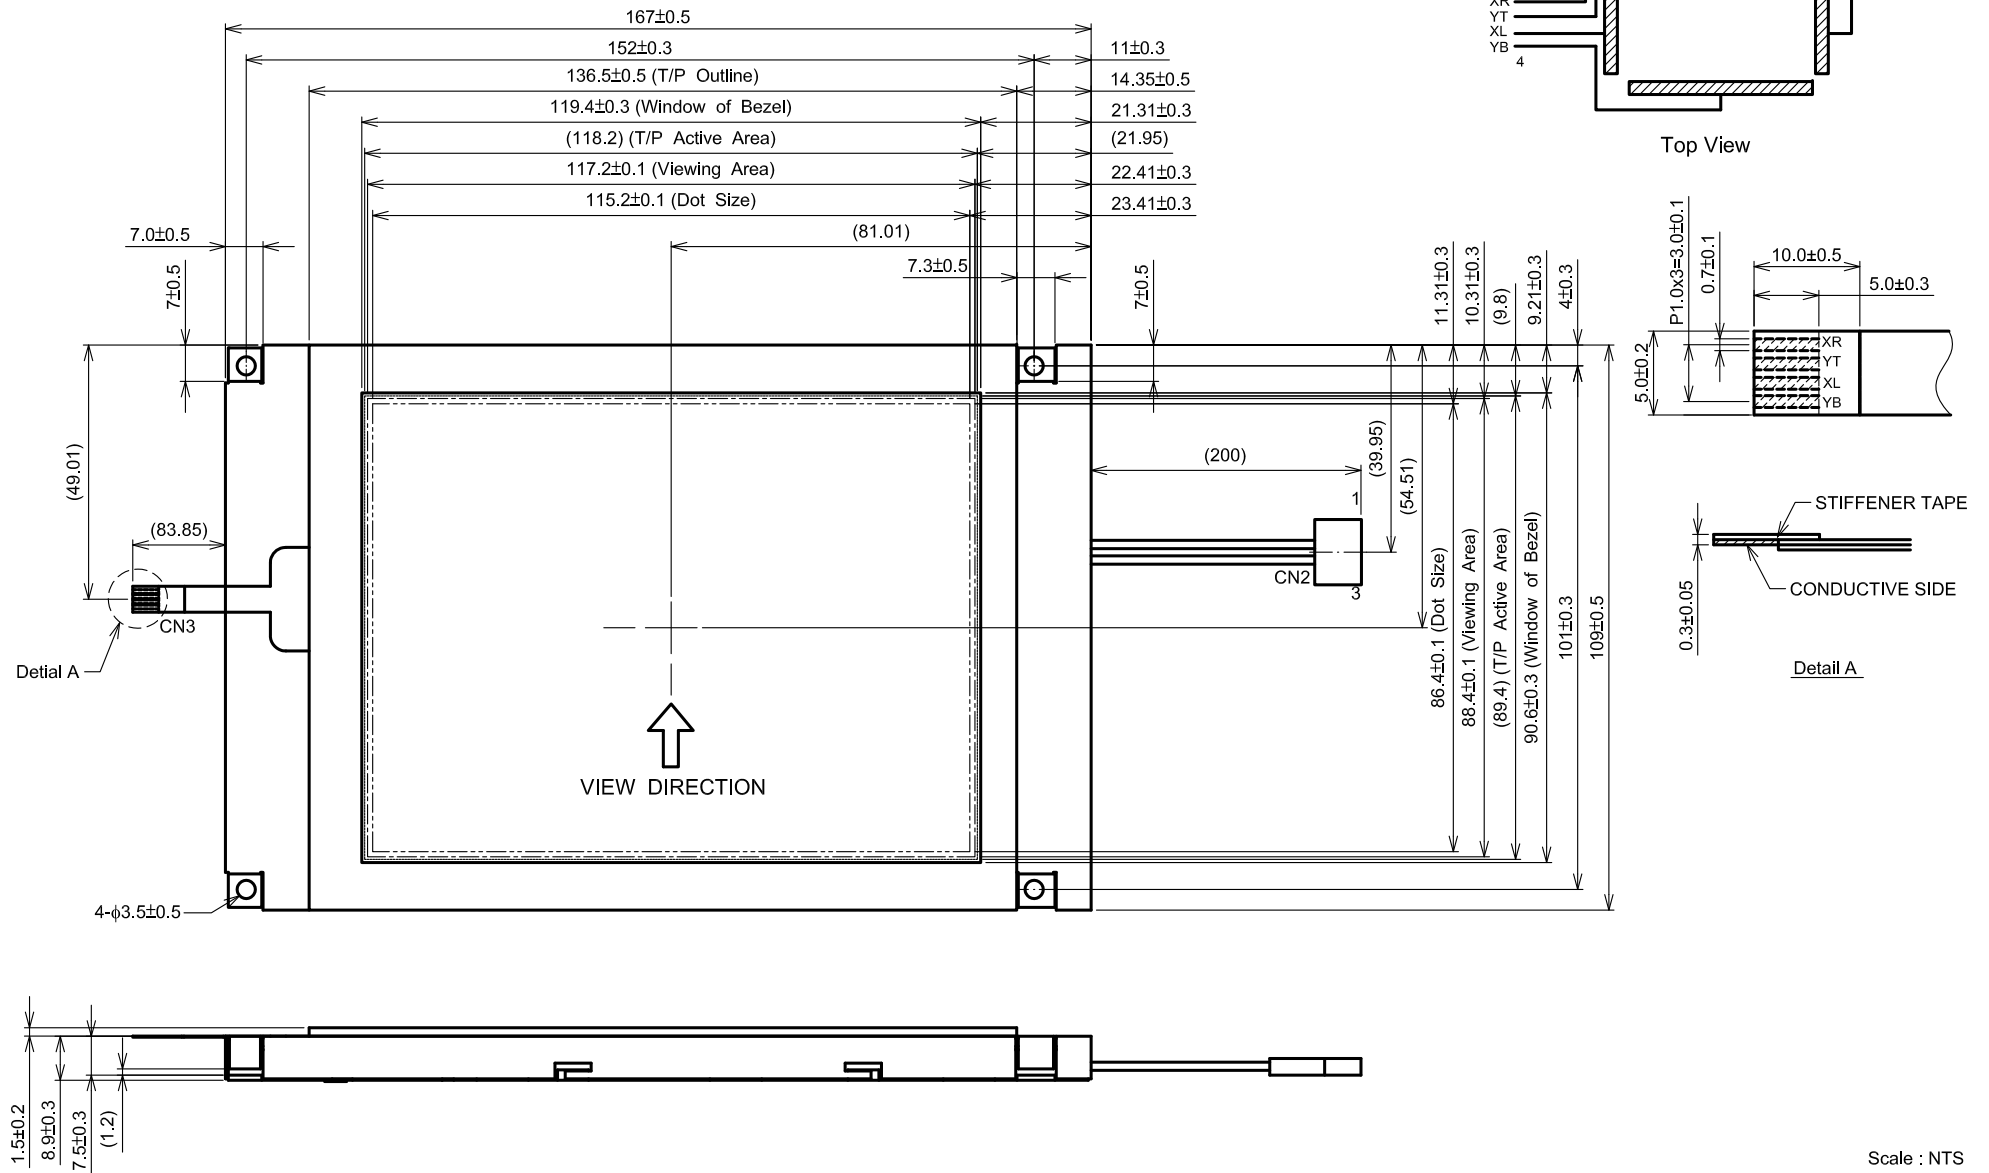

Scale : NTS
Unit : mm

9.2 REAR VIEW

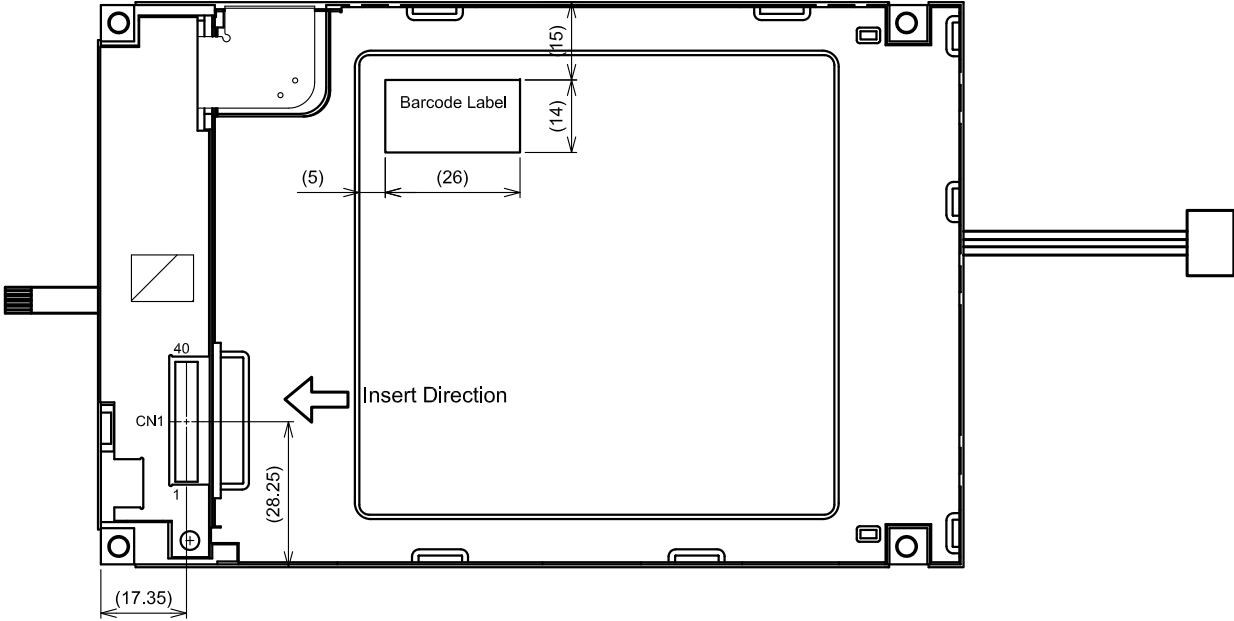

Scale : NTS
Unit : mm

10. APPEARANCE STANDARD


10.1 APPEARANCE INSPECTION CONDITION

Visual inspection should be done under the following condition.


- (1) The inspection should be done in a dark room.(More than 1000(lx) and non-directive)
- (2) The distance between eyes of an inspector and the LCD module is 30cm.
- (3) The viewing zone is shown the figure.

The θ is defined as $\theta \leq 45^\circ$ for LCM power off

$\theta \leq 5^\circ$ for LCM power on

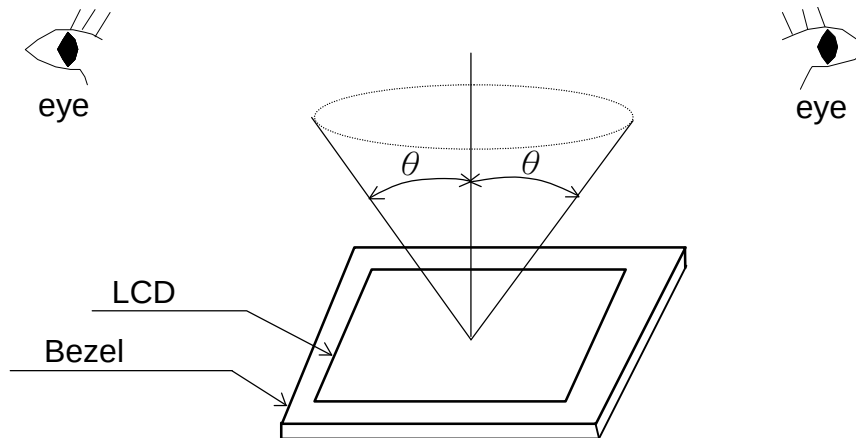

10.2 DEFINITION OF ZONE

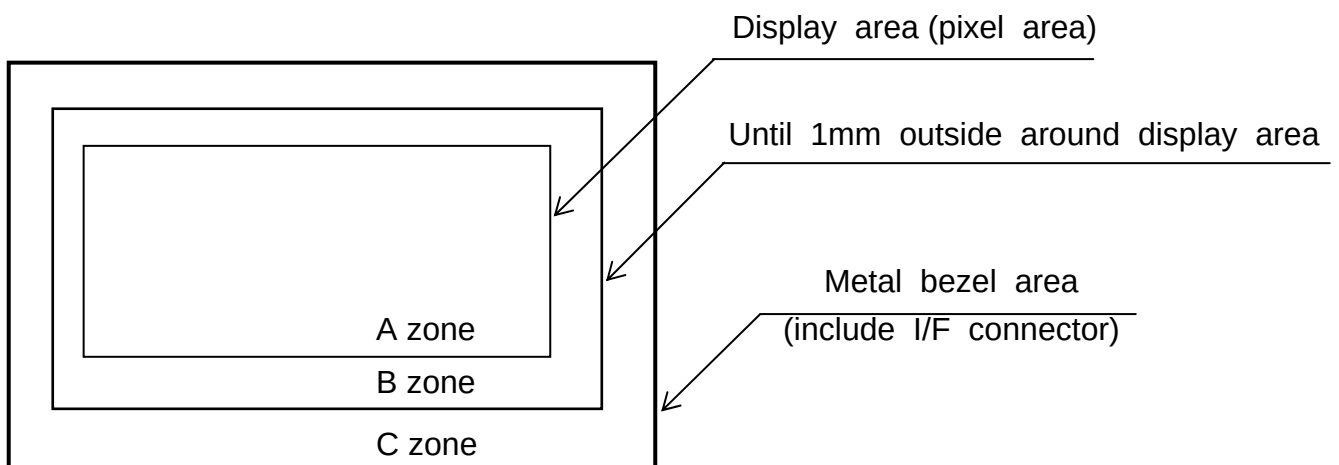

10.3 APPEARANCE SPECIFICATION

(1)LCD Appearance

*) If the problem related to this section occurs about this item , the responsible persons of both party (Customer and KOE) will discuss the matter in detail.

No.	ITEM	CRITERIA				APPLIED ZONE
L C D	Scratches	Length L(mm)	Width W(mm)	Maximum number acceptable	Minimum space	A,B
		Ignored	$W \leq 0.02$	Ignored	-	
		$L \leq 40$	$0.02 < W \leq 0.04$	10	-	
		$L \leq 20$	$W \leq 0.04$	10	-	
	Dent	Serious one is not allowed				A
	Wrinkles in Polarizer	Serious one is not allowed				A
	Bubbles	Average diameter D(mm)		Maximum number acceptable		A
		$D \leq 0.2$		Ignored		
		$0.2 < D \leq 0.3$		12		
		$0.3 < D \leq 0.5$		3		
		$0.5 < D$		none		
	Stains Foreign Materials Dark Spot	Filamentous (Line shape)				A,B
		Length L(mm)	Width W(mm)	Maximum number acceptable		
		$L \leq 2.0$	$W \leq 0.03$	Ignored		
		$L \leq 3.0$	$0.03 < W \leq 0.05$	6		
		$L \leq 2.5$	$0.05 < W \leq 0.1$	1		
		Round(Dot shape)				A,B
		Average diameter D(mm)	Maximum number acceptable	Minimum Space		
		$D < 0.2$	Ignored	-		
		$0.2 \leq D < 0.3$	10	10 mm		
		$0.3 \leq D < 0.4$	5	30 mm		
		$0.4 \leq D$	none	-		
		The total number	Filamentous + Round=10			
Those wiped out easily are acceptable						
Dot Defect			Maximum number acceptable		A	
	Sparkle mode	1 dot	4			
		2 dots	1			
		Total (Note.(3)-(f))		5		
	Black mode	1 dot	5			
		2 dots	2			
		Total (Note.(3)-(f))		5		
Total (Note.(3)-(f))		10				

(2) CFL BACKLIGHT APPEARANCE

No.	ITEM	CRITERIA			APPLIED ZONE
C F L B A C K L I G H T	Dark Spots White Spots Foreign Materials (Spot)	Average diameter D(mm)		Maximum number acceptable	A
		$D \leq 0.4$		Ignored	
		$0.4 < D$		None	
	Foreign Materials (Line)	Width W(mm)	Length L(mm)	Maximum number acceptable	A
		$W \leq 0.2$	$L \leq 2.5$	1	
			$2.5 < L$	None	
		$0.2 < W$	-	None	
	Scratches	Width W(mm)	Length L(mm)	Maximum number acceptable	A
		$W \leq 0.1$	-	Ignored	
		$0.1 < W \leq 0.2$	$L \leq 11.0$	1	
			$11.0 < L$	None	
		$0.2 < W$	-	None	





(3) Touch panel appearance

Visual inspection should be done under the following condition.


- *) The inspection should be done in a dark room. (more than 500 lx) and non-directive)
- *) The distance between eyes of an inspector and the LCD module is 30 cm.
- *) The viewing angle $\leq 60^\circ$.

No.	ITEM	CRITERIA			APPLIED ZONE
T O U C H P A N E L	Scratches	Width W(mm)	Length L(mm)	Maximum number acceptable	A,B
		$W > 0.1$	$L \geq 10$	None	
		$0.10 \geq W > 0.05$	$L < 10$	4 pcs max.	
		$0.05 \geq W$	$L < 10$	Ignored	
	Foreign Materials Dark Spot	Filamentous (Line shape)			A,B
		Width W(mm)	Length L(mm)	Maximum number acceptable	
		$W > 0.1$	-	Dust (circular)	
		$0.10 \geq W > 0.05$	$3 < L$	None	
		$0.05 \geq W$	$L \leq 3$	Ignored	
		Round(Dot shape)			A,B
		Average diameter D(mm)		Maximum number acceptable	
		$D > 0.35$		None	
		$0.35 \geq D > 0.25$		6 psc max.	
		$D \leq 0.25$		Ignored	A,B


(4) Glass indentation

ITEM		SPECIFICATIONS								
Common Indentation		<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤ 5.0</td><td>≤ 3.0</td><td>≤ 1.1</td></tr></table>			X	Y	Z	≤ 5.0	≤ 3.0	≤ 1.1
		X	Y	Z						
≤ 5.0	≤ 3.0	≤ 1.1								
Corner Broken		<table><tr><td>X</td><td>Y</td><td>Z</td></tr><tr><td>≤ 3</td><td>≤ 3</td><td>≤ 1.1</td></tr></table>			X	Y	Z	≤ 3	≤ 3	≤ 1.1
X	Y	Z								
≤ 3	≤ 3	≤ 1.1								
Proceeding Crack		None								
Other		$Y \leq 1$								


Blistering Puffiness

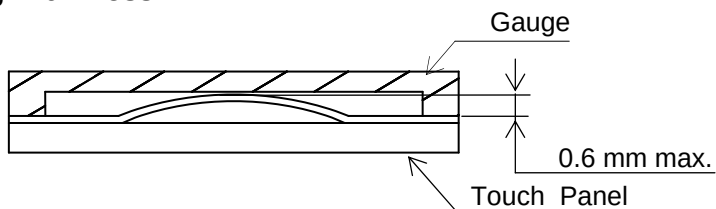

Note 1 : Definition of average diameter (D)

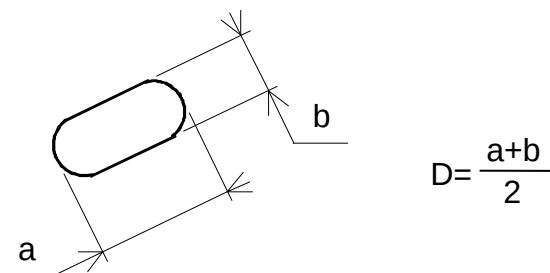

Note 2 : Definition of length (L) and width (W)

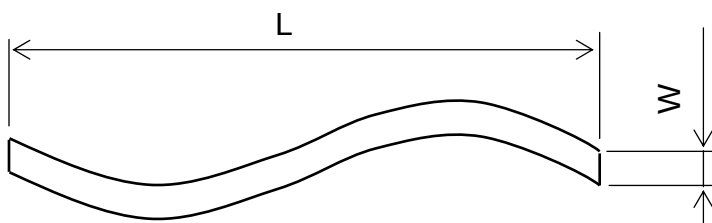

Note 3 : Definition of dot defect

- (a) Dot Defect : Defect Area $> 1/2$ dot
- (b) Sparkle mode : Brightness of dot is more than 30% at Black raster.
- (c) Black mode : Brightness of dot is less than 70% at R.G.B raster.
- (d) 1 dot : Defect dot is isolated , not attached to other defect dot.
- (e) N dot : N defect dots are consecutive (Fig.1).
(N means the number of defect dots.)

(Fig .1)

R	G	B	R	G	B	R	G	B

2 dots defect included defect dot "X" is defined as follows.

Adjacent dots to defect dot "X" :





- (f) Counting definition of adjacent dots (1 set) : same as 1 dot defect.
- (g) Those wiped out easily are acceptable.

11. PRECAUTION IN DESIGN

11.1 MOUNTING PRECAUTION

Please mount the LCD Module by using mounting holes provided. While mounting please pay attention to the followings.

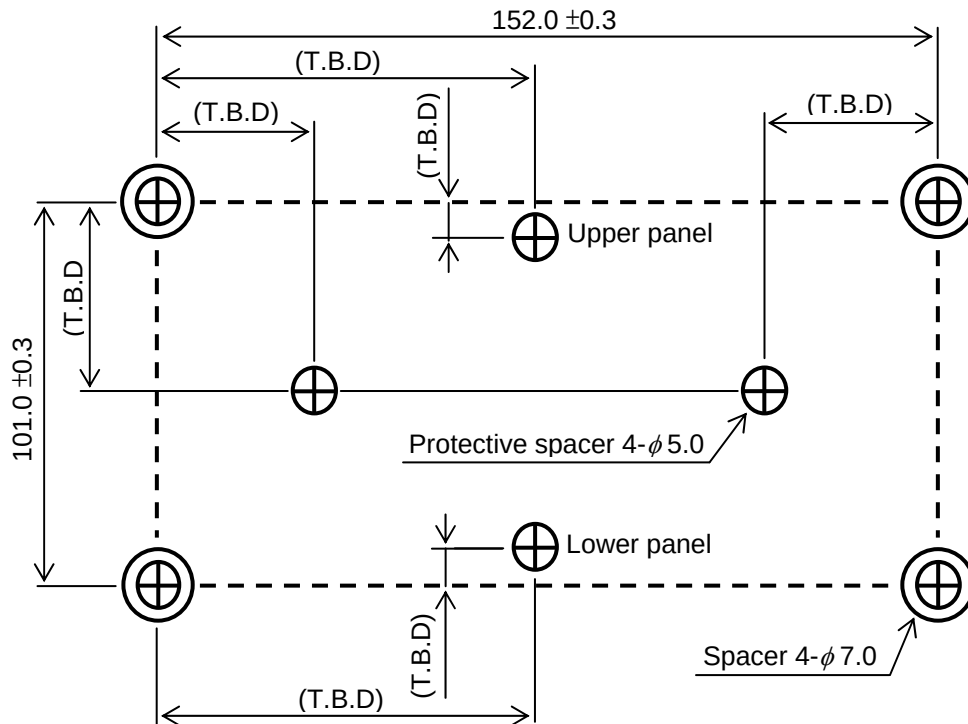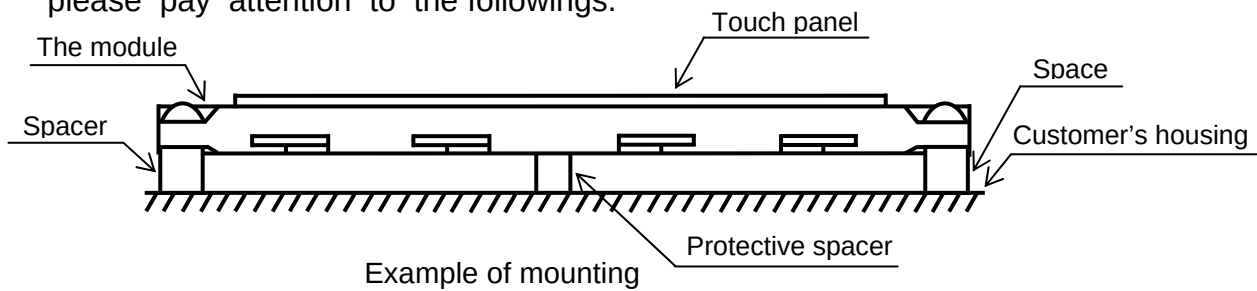

Unit : mm

Scale: NTS

Location of spacers

- (1) To prevent the module cover from being pressed, the distance between the module and the fitting plate, which means the length of the spacers, should be shorter than 1.0mm.
- (2) The use of protective spacers are recommend in order to protect the module from shock.
- (3) For the module to be used at upright position, the case shall have a structure where the touch panel screen does not shift with its own weight.

11.2 PRECAUTIONS AGAINST ELECTROSTATIC DISCHARGE

As this module contains C-MOS LSIs, it is not strong against electrostatic discharge. Make certain that the operator's body is connected to the ground through a list band , etc. And don't touch I/F pins directly.

11.3 HANDLING PRECAUTIONS

- (1) Since the Touch Panel on the top, and the frame on the bottom tend to be easily damaged, they should be with full care so as not to get them touched, pushed or rubbed by a piece of glass, tweezers and anything else which are harder than a pencil lead 2H.
- (2) As the adhesives used for adhering upper/lower polarizer's and frame are made of organic substances which will be deteriorated by a chemical reaction with such chemicals as acetone, toluene, ethanol and isopropyl alcohol. The following are recommended for use :
normal hexane
Please contact with us when it is necessary for you to use chemicals other than the above.
- (3) Lightly wipe to clean the dirty surface with absorbent cotton or other soft material like chamois, soaked in the recommended chemicals without scrubbing it hard. Always wipe the surface horizontally or vertically. Never give a wipe in a circle. To prevent the display surface from damage and keep the appearance in good state, it is sufficient, in general, to wipe it with absorbent cotton.
- (4) Immediately wipe off saliva or water drop attached on the display area because it may cause deformation or faded color.
- (5) Foggy dew deposited on the surface may cause a damage, stain or dirt to the polarizer.
When you need to take out the LCD module from some place at low temperature for test, etc.
It is required to be warmed them up to temperature higher than room temperature before taking them out.
- (6) Touching the display area or I/F pins with bare hands or contaminating them are prohibited, because the stain on the display area and poor insulation between terminals are often caused by being touched with bare hands.
(Some cosmetics are detrimental to polarizer's.)
- (7) In general, the glass is fragile so that, especially on its periphery, tends to be cracked or chipped in handling. Please not give the LCD module sharp shocks by falling, etc.
- (8) Maximum pressure to the surface must be less than 1.96×10^4 Pa.
And if the pressure area is less than 1cm^2 , maximum pressure must be less than 1.96N.
- (9) Since the metal width is narrow on these locations (see page 9-1/2), please careful with handling.
- (10) Top sheets shall be cleaned gently using a soft cloth such as those used for glasses.
Hard wiping accumulated dust will leave scars on the surface even using a cloth.

11.4 OPERATION PRECAUTION

- (1) Using a LCM module beyond its maximum ratings may result in its permanent destruction.
LCM module's should usually be used under recommended operating conditions shown in chapter 4. Exceeding any of these conditions may adversely affect its reliability.
- (2) Response time will be extremely delayed at lower temperature than the specified operating temperature range and on the other hand LCD's shows dark blue at higher temperature.
However those phenomena do not main defects of the LCD module. Those phenomena will disappear in the specified operating temperature range.
- (3) If the display area is pushed hard during operation, some display patterns will be abnormally display.
- (4) A slight dew depositing on terminals may cause electrochemical reaction which leads to terminal open circuit. Please operate the LCD module under the relative condition of 40°C 85%RH.
- (5) Resistance range : Your controller shall be set up to allow the resistance range of Touch Panel specified in our CAS.
- (6) Pointed position of Touch Panel may shift owing to a change in resistance of Touch Panel depending on the operation condition . To compensate this shift, the set shall be given a calibration function.
- (7) Input shall be made with a stylus pen (poly acetal , R0.8). Chances are very high that use of a metal piece including a ball point pen or sharp edge will impair accuracy.
- (8) The Touch Panel is an auxiliary input device. The system shall be designed to have other input device.

11.5 STORAGE

In case of storing LCD module for a long period of time (for instance, for years) for the purpose of replacement use, the following precautions necessary.

- (1) Store the LCD modules in a dark place; do not expose them to sunlight or ultraviolet rays.
- (2) Keep the temperature between 10°C and 35°C at normal humidity.
- (3) Store the LCD modules in the container which is used for shipping from us.
- (4) No articles shall be left on the surface over an extended period of time.

11.6 SAFETY

Wear finger cots or gloves whenever handling or assembling a Touch Panel its glass edges are sharp.

KAOHSIUNG OPTO-ELECTRONICS INC.	SHEET NO.	7B64PS 2711-TX14D11VM1CAA-7	PAGE	11-3/3
---------------------------------	--------------	-----------------------------	------	--------

12. DESIGNATION OF LOT MARK

12.1 LOT MARK

Lot mark is consisted of 5 digits for production lot and 6 digits for production control.

8	0	4	1	T						
					Digits for production control					
					T : Made in Taiwan					
					Week					
					Month					
					Year					

Year	Figure in lot mark
2012	2
2013	3
2014	4
2015	5
2016	6

Month	Figure in lot mark	Month	Figure in lot mark
Jan.	01	Jul.	07
Feb.	02	Aug.	08
Mar.	03	Sep.	09
Apr.	04	Oct.	10
May	05	Nov.	11
Jun.	06	Dec.	12

Week (day in calendar)	Figure in lot mark
1~ 7	1
8~14	2
15~21	3
22~28	4
29~31	5

12.2 SERIAL No.


Serial No. is consisted of 6 digits number (000001~999999).

12.3 LOCATION OF LOT MARK

Label is bring attached on the back side of module.

12.4 REVISION(Rev.) CONTROL

Rev No.	ITEM
-	CN1 JAE : FA5B040HF1
A	CN1 JAE : FA5B040HP1R3000

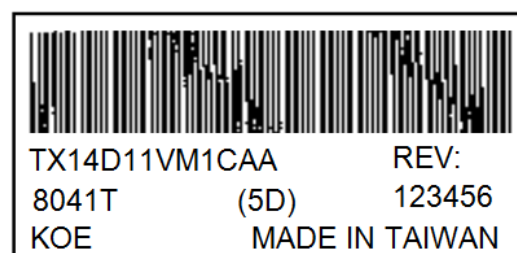

13. PRECAUTION FOR USE

- (1) A limit sample should be provided by the both parties on an occasion when the both parties agree to its necessity.

Judgment by a limit sample shall take effect after the limit sample has been established and confirmed by the both parties.

- (2) On the following occasions, the handling of the problem should be decided through discussion and agreement between responsible persons of the both parties.

(1) When a question is arisen in the specifications.

(2) When a new problem is arisen which is not specified in this specifications.

(3) When an inspection specifications change or operating condition change by customer is reported to KOE, and some problem is arisen in the specification due to the change.

(4) When a new problem is arisen at the customer's operating set for sample evaluation.

- (3) Regarding the treatment for maintenance and repairing, both parties will discuss it in six months later after latest delivery of this product.

The precaution that should be observed when handling LCM have been explained above.

If any points are unclear or if you have any requests , please contact with KOE.