

PREPARED BY: _____	DATE _____	 DISPLAY DEVICE GROUP SHARP INVESTMENT CO.,LTD SPECIFICATION	SPEC No. LCY-W11206B
			FILE No. _____
APPROVED BY: _____	DATE _____		ISSUE: Aug. 23. 2012
			PAGE : 16 pages

DEVICE SPECIFICATION FOR

TFT-LCD module

MODEL No. LQ050Y3DC01

CUSTOMER'S APPROVAL

DATE _____
 BY _____

DATE _____
 BY _____

PRESENTED
 BY *T. Yamamoto*
 TAKAHIRO YAMAMOTO
 DEPARTMENT GENERAL MANAGER
 DEVELOPMENT DIVISION II
 DESIGN CENTER 2
 DISPLAY DEVICE GROUP
 SHARP INVESTMENT CO.,LTD

[illegible]

NOTICE

These specification sheets are the proprietary of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of these specification sheets may be reproduced or transmitted in any form or by any means, electronic or mechanical for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of these specification sheets may be made by a third party.

For the stable supply of this module, the components of the module may be changed or purchased from more than one suppliers, based on these specification sheets. Please understand this situation and we will inform you in advance.

The application circuit examples in these specification sheets are provided to explain the representative applications of SHARP's devices and are not intended to guarantee any circuit design or permit any industrial property right or other rights to be executed. SHARP takes no responsibility for any problems related to any industrial property right or a third party resulting from the use of SHARP's devices, except for those resulting directly from device manufacturing processes.

In the absence of confirmation by device specification sheets, SHARP takes no responsibility for any defects that occur in equipment using any of SHARP's devices, shown in catalogs, data books, etc. Contact SHARP in order to obtain the latest device specification sheets before using any SHARP's device.

SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structures and other contents described herein at any time without notice in order to improve design or reliability. Contact SHARP in order to obtain the latest specification sheets before using any SHARP's device. Manufacturing locations are also subject to change without notice.

Observe the following points when using any device in these specification sheets. SHARP takes no responsibility for damage caused by improper use of the devices.

The devices in these specification sheets are designed for use in general electronic equipment designs, such as:

- Personal computers • Office automation • Telecommunication equipment
- Test and measurement equipment • Industrial control • Personal Digital Assistant
- Audio visual and multimedia equipment • Consumer electronics

The appropriate design measures should be taken to ensure reliability and safety when SHARP's devices are used for equipment such as:

- Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
- Traffic signals • Gas leakage sensor breakers • Alarm equipment • Various safety devices etc.

SHARP's devices shall not be used for equipment that requires extremely high level of reliability, such as:

- Military and space applications • Nuclear power control equipment • Medical equipment for life support

Contact a SHARP representative, in advance, when intending to use SHARP's devices for any "specific" applications other than those recommended by SHARP.

Contact and consult with a SHARP representative if there are any questions about the contents of these specification sheets.

1. APPLICABLE SCOPE

This specification is applicable to TFT-LCD Module "LQ050Y3DC01" only.

2. General Description

This module is a color active matrix LCD module incorporating amorphous silicon TFT (Thin Film Transistor). It is composed of a color TFT-LCD panel, driver ICs, Input FPC, a back light unit. Graphics and texts can be displayed on a 800×RGB×480 dots panel, four timing signals, serial interface, (typ. +3.3V) supply voltages for TFT-LCD panel driving and supply voltage for back light.

3. Mechanical (Physical) Specifications

Item	Specifications	Unit
Screen size	5.0	inch
Active area	108 (H)×64.8(V)	mm
Pixel format	800×480	Pixel
	1Pixel =R+G+B dots	
Pixel pitch	0.135(H)×0.135(V)	mm
Pixel configuration	R,G,B vertical stripes	
Display mode	Normally white	
Unit outline dimensions	118.50(W)×77.55(H)×2.90(D)	mm
Mass	55.8	g

*The above-mentioned table indicates module sizes without some projections and FPC.
For detailed measurements and tolerances, please refer to 16. Outline Dimensions.

4. Input Terminal Names and Functions

Recommendation CN : FH19SC-40S-0.5SH(55) (HRS)(40pin/0.5mm pitch/Up contact)

Pin No.	Symbol	I/O	Description	Remarks
1	VLED-	P	Power supply for LED (Low voltage)	
2	VLED+	P	Power supply for LED (High voltage)	
3	DGND	P	Digital Ground	
4	VDD	P	Power supply	
5	R0	I	RED data signal	
6	R1	I	RED data signal	
7	R2	I	RED data signal	
8	R3	I	RED data signal	
9	R4	I	RED data signal	
10	R5	I	RED data signal	
11	R6	I	RED data signal	
12	R7	I	RED data signal	
13	G0	I	GREEN data signal	
14	G1	I	GREEN data signal	
15	G2	I	GREEN data signal	
16	G3	I	GREEN data signal	
17	G4	I	GREEN data signal	
18	G5	I	GREEN data signal	
19	G6	I	GREEN data signal	
20	G7	I	GREEN data signal	
21	B0	I	BLUE data signal	
22	B1	I	BLUE data signal	
23	B2	I	BLUE data signal	
24	B3	I	BLUE data signal	
25	B4	I	BLUE data signal	
26	B5	I	BLUE data signal	
27	B6	I	BLUE data signal	
28	B7	I	BLUE data signal	
29	DGND	P	Digital Ground	
30	DCLK	I	Clock input pin in serial mode	
31	DISP	I	Display On/Off	High(VDD) normally operation
32	Hsync	I	Line synchronization signal	
33	Vsync	I	Frame synchronization signal	
34	DEN	I	Data input enable	High(VDD) enable
35	NC	I	No connection	
36	DGND	P	Digital Ground	
37	XR	-	No connection	
38	YD	-	No connection	
39	XL	-	No connection	
40	YU	-	No connection	

Note1: I/O definition: I---Input O---Output P---Power/Ground

5. Absolute Maximum Ratings

Item	Symbol	Conditions	Rated value	Unit	Remarks
Digital power supply voltage	VDD	Ta = 25°C	-0.5 ~ +5.0	V	Note 1
Temperature for storage	Tstg	-	-30 ~ +80	°C	Note 2
Temperature for operation	Topr	-	-20 ~ +70	°C	Note 3
BL input electric current	I _{BL}	Ta = 25°C	60	mA	Note 4
LED electricity consumption	P _{LED}	Ta = 25°C	105	mW	Note 4

Note 1) B7~B0, G7~G0, R7~R0, DISP, VSYNC, HSYNC, DEN, DCLK

Note 2) Ta > 60°C Absolute humidity shall be less than Ta=60°C /90 % RH.

Note 3) Panel surface temperature prescribes.

(Reliability is examined at ambient temperature of 50°C.)

Note 4) Power consumption of one LED (Ta = 25°C). (use 14 pieces LED)

6. Electrical Characteristics

6-1. Electrical characteristics

Ta = 25°C

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit	Applicable Pin
Supply voltage	VDD-GND	Operating voltage	2.7	3.3	3.6	V	(note 1)
"H" level input voltage	V _{IH}	-	0.7xVDD	-	VDD	V	For digital circuit
"L" level input voltage	V _{IL}		0	-	0.3xVDD	V	
Input leakage current	I _{LI}	VIN=VDD or VSS	-	-	±0.1	μA	(note 1,2)
"H" level output voltage	V _{OH}	IOL=-1.0mA	VDD-0.4	-	-	V	(note 1,2)
"L" level output voltage	V _{OL}	IOL=1.0mA	-	-	VSS+0.4	V	
Current consumption 1 (normal display)	I _{cc}	Ta=25°C	-	135	190	mA	(note 3)

(note 1) VDD=2.7 to 3.6V, GND=0V, Ta=-40 to 85°C

(note 2) B7~B0, G7~G0, R7~R0, DISP, VSYNC, HSYNC, DEN, DCLK.

(note 3) Following Conditions

Display Pattern: All OFF (black) Pattern.



*All OFF (black) Pattern

6-2. Back light driving

The back light system has fourteen LEDs


Ta=25℃

Parameter	Symbol	Min.	Typ.	Max.	Unit	Remark
Rated Voltage	V _{BL}	21.0	22.4	23.8	V	
Rated Current	I _{BL}	-	40	-	mA	
Power consumption	W _L	-	896	-	mW	

*1 per one piece of Backlight

*Please consider Allowable Forward Current on used temperature

Ambient temperature and the maximum input of 1 per LED are fulfilling the following operating conditions.

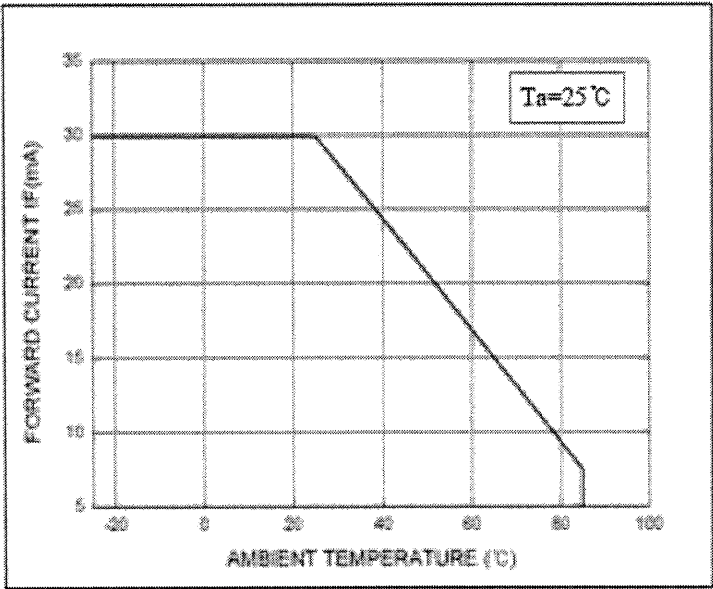

Ambient temperature and the maximum input of 1 per LED

7. Timing characteristics of input signals

7-1. Power on/off control

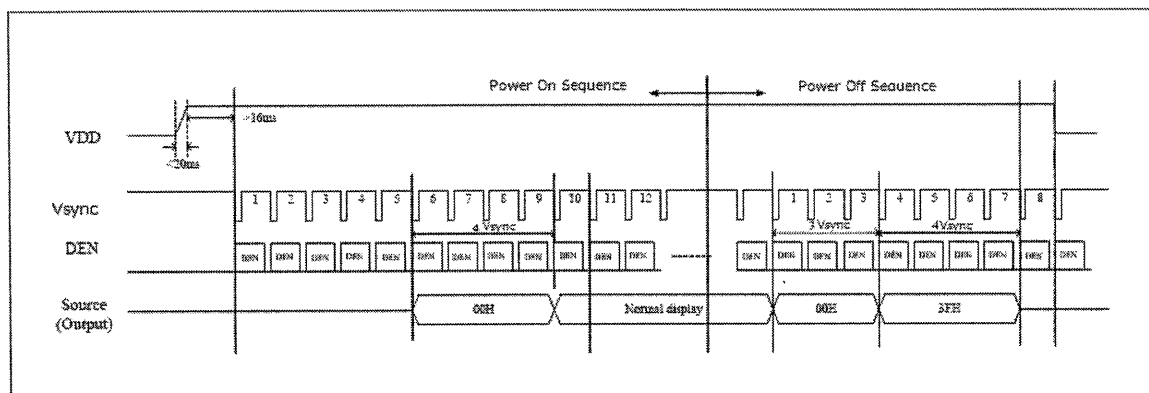


Figure 7. 1 Power on/off Timing Sequence

7-2. AC electrical characteristics

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
HS setup time	T_{hst}	8	-	-	ns
HS hold time	T_{hhd}	8	-	-	ns
VS setup time	T_{vst}	8	-	-	ns
VS hold time	T_{vhd}	8	-	-	ns
Data setup time	T_{dsu}	8	-	-	ns
Data hold time	T_{dhd}	8	-	-	ns
DE setup time	T_{esu}	8	-	-	ns
DE hold time	T_{ehd}	8	-	-	ns
VDD Power On Slew rate	T_{POR}	-	-	20	ms
RSTB pulse width	T_{Rst}	10	-	-	us
CLKIN cycle time	T_{cph}	20	-	-	ns
CLKIN pulse duty	T_{cwh}	40	50	60	%
Output stable time	T_{sst}	-	-	6	us

7-3. Horizontal timing

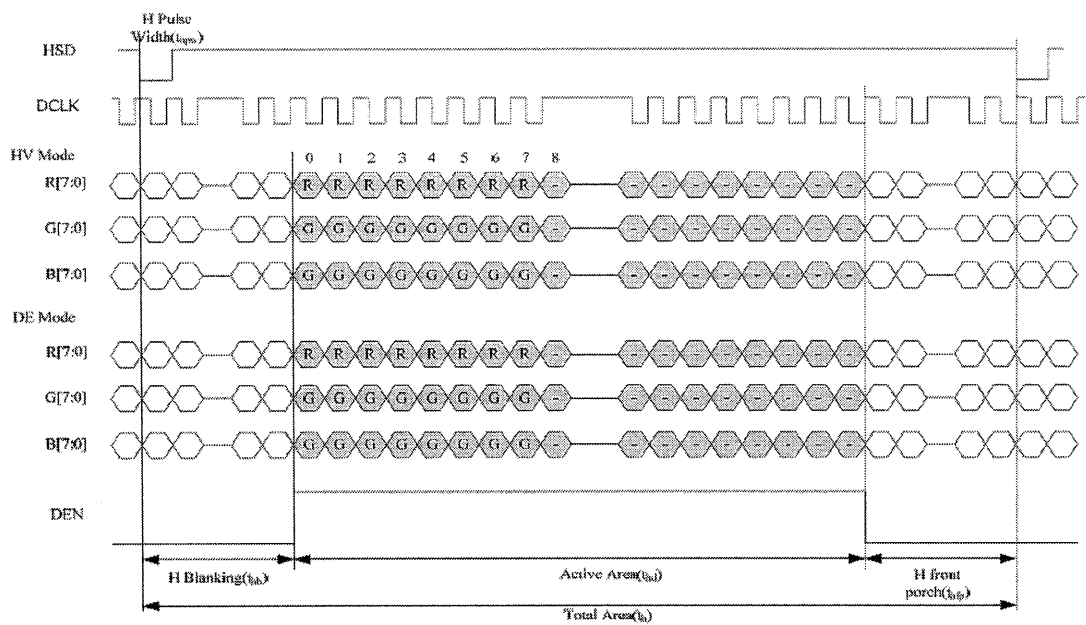


Figure 7.3 Horizontal Input Timing Diagram

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Horizontal Display Area	thd		800		DCLK
DCLK frequency	fclk	-	30	50	MHz
One Horizontal Line	th	889	928	1143	DCLK
HS pulse width	thpw	1	48	255	DCLK
HS Back Porch (Blanking)	thb		88		DCLK
HS Front Porch	thfp	1	40	255	DCLK
DE mode Blanking	th-thd	85	128	512	DCLK

7-4. Vertical timing

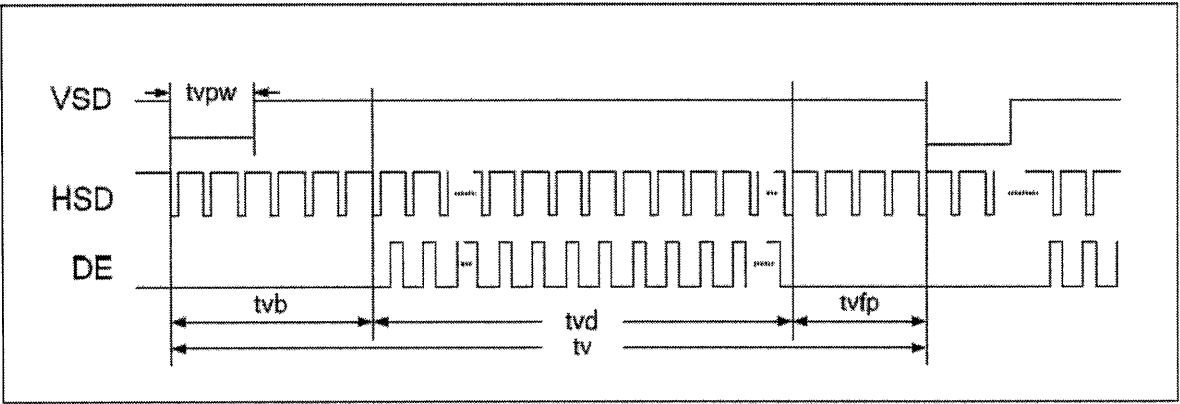


Figure 7.4 Vertical Input Timing Diagram

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Vertical Display Area	tvd	480			T _H
VS period time	tv	513	525	767	T _H
VS pulse width	tpw	3	3	255	T _H
VS Back Porch (Blanking)	tvb	32			T _H
VS Front Porch	tvfp	1	13	255	T _H
DE mode Blanking	tv-tvd	4	45	255	T _H

8. Optical Characteristics of Module

Ta = 25°C, VDD = +3.3V

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	Remark
Viewing angle range (Without Wide View)	Horizontal	θ21	CR>10	60	70	-	deg.	【Note1,4】
		θ22		60	70	-	deg.	
	Vertical	θ11		60	70	-	deg.	
		θ12		40	50	-	deg.	
Contrast ratio		CR	Optimum viewing angle	500	600	-	-	【Note2,4】
Response	Rise	Tr	θ=0°	-	12	-	ms	【Note3,4】
Time	Decay	Td		-	4	-	ms	
Chromaticity of White		x		0.26	0.31	0.36	-	【Note4】
		y		0.28	0.33	0.38	-	
Luminance of white		XL1		240	300	-	cd/m²	ILED=20mA 【Note6】
Uniformity		U		70	80	-	%	【Note5】

* The optical characteristics measurements are operated under a stable luminescence (I_{BL} = 40mA) and a dark condition. (Refer to Fig.1)


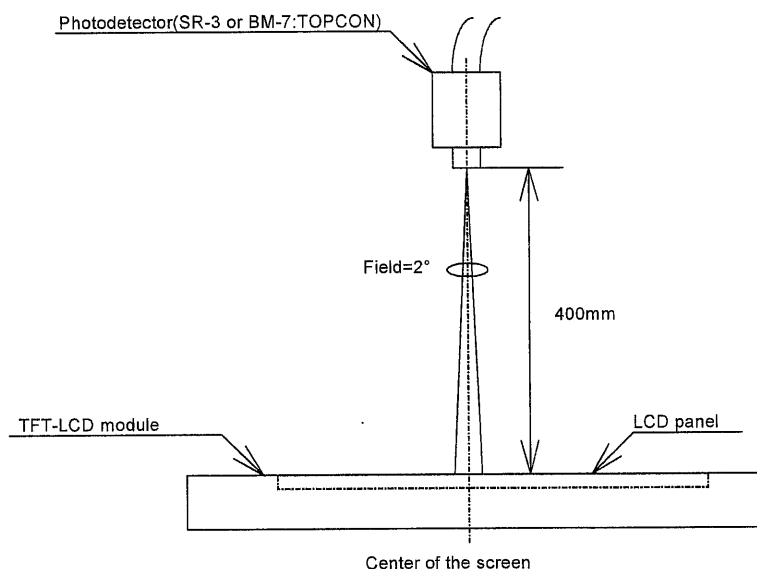


Fig.1 Optical characteristics measurement method

【 Note 1 】 Definitions of viewing angle range

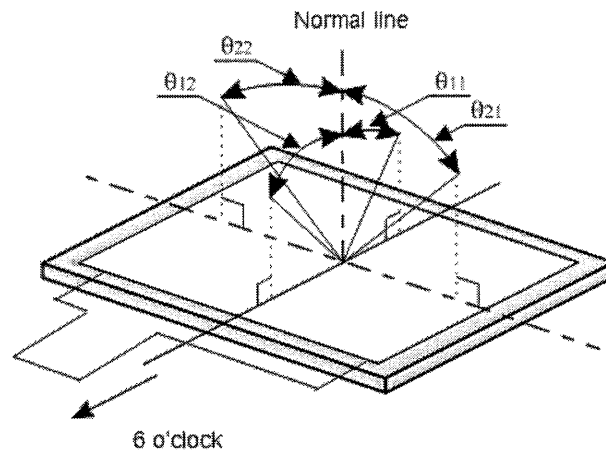


【 Note 2 】 Definition of contrast ratio

The contrast ratio is defined as the following

$$\text{Contrast ratio (CR)} = \frac{\text{Luminance (brightness) with all pixels white}}{\text{Luminance (brightness) with all pixels black}}$$

【 Note 3 】 Definition of response time

The response time is defined as the LCD optical switching time interval between "White" state and "Black" state. Rise time (T_{ON}) is the time between photo detector output intensity changed from 90% to 10%. And fall time (T_{OFF}) is the time between photo detector output intensity changed from 10% to 90%.

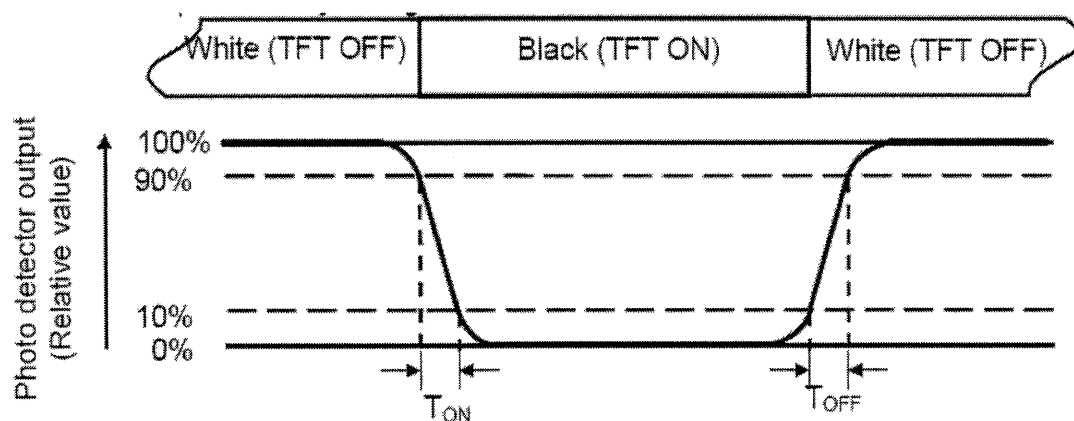


【 Note 4 】 This shall be measured at center of the screen.

【 Note 5 】 Definition of Uniformity

$$\text{Uniformity} = \frac{\text{Minimum Brightness}}{\text{Maximum Brightness}} \times 100 (\%)$$

The brightness should be measured on the 9-point as shown in the right figure.

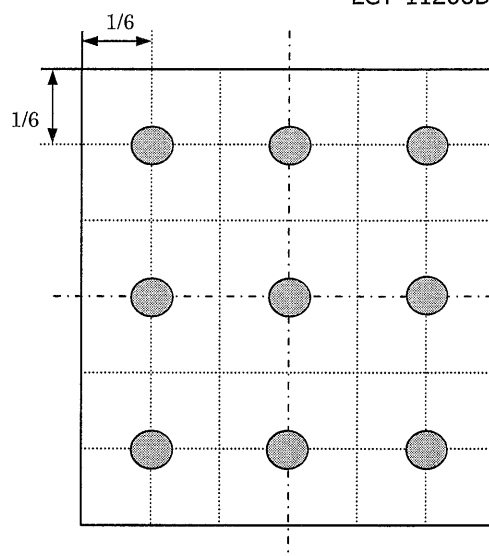

【 Note 6 】 This shall be measured on the 9-point as shown in the right figure.

$$\text{Luminance of white} = \frac{\text{Summation of the 9 - point Brightness}}{9}$$

9. Reliability test items

No.	Test	Condition	Judgment criteria
1	Temperature Cycling Storage	-30deg.C(0.5h) $\longleftrightarrow$ 80 deg.C(0.5h) *1cycle 200cycle	Per table in below
2	High Temp. Storage	Ta=80°C 240h	Per table in below
3	Low Temp. Storage	Ta=-30°C 240h	Per table in below
4	High Temperature & High Humidity Storage	Ta=60°C90%RH 240h	Per table in below (polarizer discoloration is excluded)
5	High Temp. Operation	Ta=70°C 240h	Per table in below
6	Low Temp. Operation	Ta=-20°C 240h	Per table in below
7	ESD	Discharge resistance: 0 Ω Discharge capacitor: 200 pF Discharge voltage: ± 200 V Max Discharge 1 time to each input line ※ "GND" of display module is connected GND of test system ground.	Per table in below

【Note】 Ta = Ambient temperature

INSPECTION	CRITERION(after test)
Appearance	No Crack on the FPC, on the LCD Panel
Alignment of LCD Panel	No Bubbles in the LCD Panel No other Defects of Alignment in Active area
Electrical current	Within device specifications
Function / Display	No Broken Circuit, No Short Circuit or No Black line No Other Defects of Display


10. Packaging specifications

- (10-1) Details of packaging
 - 1) Packaging materials:

	Parts name	Materials
1	Master carton	Corrugate card board
2	Storage case	Corrugate card board
3	Protective bag	Polyethylene with anti-static treatment
4	OPP tape	Polypropylene
5	Bar code label	Anti-static polyethylene



2) Packaging style:

TYPE		Internal NO. (45) L0050Y3DC01
QUANTITY		Lot NO. : (11) 2011. 04. 12
LOT (DATE)		Quantity: (Q) 76 PCS
		User NO. :
		SHARP Distribution Label: ()



[Quantities]

1 carton: 76 modules (MAX)

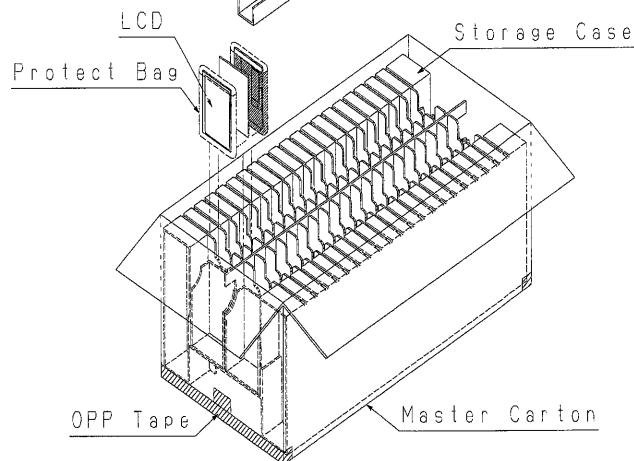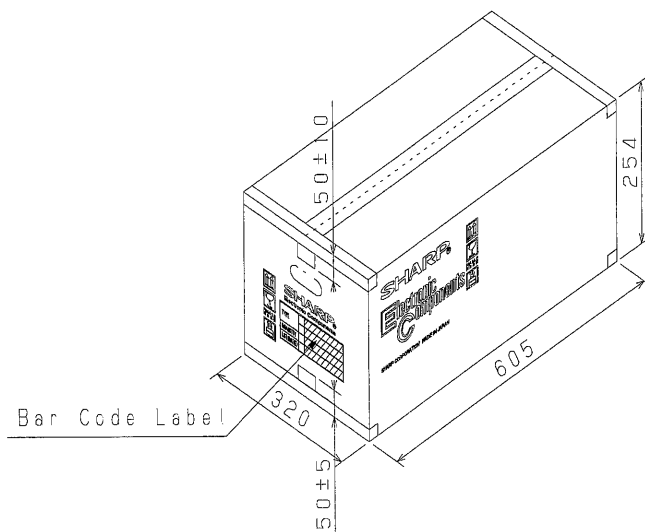

- (10-2) Reliability
 - 1) Vibration test

Item	Test
Frequency range	10 Hz to 55 Hz
Stroke	1.5mm
Sweep	10Hz~55Hz~10Hz (2 hours)
Direction	For each direction of X,Y,Z (6 hours for total)(Package condition)

2) Drop test

Drop height: 800mm

Number of drop: 10 times (Drop sequence: 1 corner, 3 edges, 6 faces)

- (10-3) Packaging quantities
76 modules per master carton
- (10-4) Packaging weight
6.3kg
- (10-5) Packaging outline dimensions
605mm×320mm×254mm

11. LCD Module Code**LQ050Y3DC01**12. Serial Number Label Identification

1 4 11 00001 A Q
① ② ③ ④ ⑤ ⑥

- ① Production Year (0~)
- ② Production Month (1~9,X,Y,Z)
- ③ Production Day
- ④ Serial No (00001~)
- ⑤ Revision Code (A,B,C~)
- ⑥ Production Plant Code

[Note] Production Year : 0(2010)、1(2011)、2(2012)、...

Production Month : 1(Jan)、2(Feb)、...、9(Sep)、X(Oct)、Y(Nov)、Z(Dec)

